

30 01 2020 (V.2.03)
Offline

NRG Pro II & NRG XC II



Manual

 **APCO Aviation**
Setting Future Standards

Factory: 7, Chalamish Street - Industrial Park - Caesarea 38900 ISRAEL www.apcoaviation.com
Tel: +972 4 6273727 Fax +972 4 6273728



CONTENTS:

1	NRG PRO II	4
2	NRG XC II	5
3	DETAILED COMPARISON (XC II vs. PRO II)	6
4	NRG PRO II TECHNICAL DATA	8
5	NRG XC II TECHNICAL DATA	9
6	DISCLAIMER OF LIABILITY	10
7	CONSTRUCTION	10
8	MATERIALS	10
9	FLEXON® Batten system:	11
10	TRIMMING	11
11	HARNESS	12
12	SPEED SYSTEM	12
12.1	ASSEMBLY & ADJUSTMENT	12
13	EMERGENCY PARACHUTE ATTACHMENT	12
14	RISERS	12
15	TRIMMERS	15
16	OAA (One Action Acceleration)	16
17	HIT VALVES (High speed In-Take)	17
18	SRS – Stall Recovery System	18
1	ABS - Automatic Balance System (on NRG XC II)	19
2	INSPECTION	19
2.1	GENERAL	19
3	ANNUAL / PERIODICAL AIRWORTHINESS INSPECTION	20
4	BEFORE THE FIRST FLIGHT	21
	BRAKE SETTING	21
4.1	Brake Operation	22
4.2	FIRST CHECK AND PREFLIGHT INSPECTION	22
4.3	REGULAR INSPECTION CHECKS	22
4.4	LINE MAINTENANCE	22
5	PARAGLIDING	23
5.1	TAKE OFF	23
5.1.1	LAYOUT	23
5.1.2	ALPINE LAUNCH OR FORWARD LAUNCH	24
5.1.3	STRONG WIND AND REVERSE LAUNCH	24
5.1.4	TOW OR WINCH LAUNCHING	24
5.2	FLIGHT TECHNIQUES	24
5.2.1	FLYING SPEED	24
5.2.2	THERMAL FLYING	25
5.2.3	ASYMMETRIC COLLAPSE	25
5.2.4	CRAVAT	26
5.2.5	FRONT STALL OR SYMMETRIC COLLAPSE	26
5.2.6	B-STALL	26
5.2.7	BIG EARS	26
5.2.8	DEEP STALL OR PARACHUTAL STALL	26
5.2.9	SPIRAL DIVES	27
5.2.10	STRONG TURBULENCE	27
5.2.11	STEERING NOT FUNCTIONING	27
5.2.12	LANDING	28
5.2.13	TREE LANDING	28
5.2.14	WATER LANDING	28
6	POWERED FLYING	28
6.1	FIRST FLIGHTS	29
6.2	TAKE-OFF	29
6.2.1	FORWARD LAUNCH	29
6.2.2	REVERSE LAUNCH (In strong wind)	30
6.2.3	CLIMBING	31
6.3	LEVEL FLIGHT	32
6.4	TRIMMERS AND SPEED-SYSTEM SETTINGS	33
6.5	LANDING	33
6.5.1	POWER OFF LANDING	33
6.5.2	POWERED LANDING	33
7	PACKING	34
8	MAINTENANCE & CLEANING	35
8.1	BUTT HOLES (Velcro closure on trailing edge tip)	35
9	STORAGE	35
10	DAMAGE	36
11	GENERAL ADVICE	36
12	NRG PRO II/NRG XC II SKETCHES	37





WARNING

This is not a training manual. It is extremely dangerous to yourself and others to attempt to fly this or any paraglider without first completing a flying course given by a qualified instructor.

Apco Aviation's gliders are carefully manufactured and inspected by the factory. Please use the glider only as described in this manual. Do not make any changes to the glider.

**AS WITH ANY SPORT - WITHOUT TAKING THE APPROPRIATE PRECAUTIONS,
PARAGLIDING CAN BE DANGEROUS.**





1 NRG PRO II

The APCO **NRG Pro II** is the ultimate answer to the fast growing, challenging segment of purpose built wings designed for professional slalom racing.

NRG Pro II is a complete redesign of the previous NRG - and is now a faster, more aggressive wing with pylon racing performance and spirit!

The pylon racing turning sequence of:

» :: FULL SPEED BAR TO THE PYLON » RELEASE SPEED BAR » TIGHT TURN » FULL SPEED BAR TO NEXT PYLON :: »

has been perfected to a point where it is only the pilot who can limit the wing and never the opposite!

HIT VALVES® - A highly stable, full reflex profile with our HIT valves incorporated, allows pushing this wing beyond any familiar boundaries.

OAA® system - incorporated into **NRG Pro II** risers allows for use of full speed range using the speed bar only.

The change from trim speed to fully accelerated is faster than ever before with the **OAA** system.

For normal flight **OAA** can be easily disengaged, allowing for operation of trimmers separate from speed bar.

2D Steering - allows for one hand use of both tip steering and main brakes.

The NRG PRO is the favorite wing for most professional pilots, but now it's time to take it up to the next level. **NRG Pro II** is an adrenaline junkies dream and still rock solid safe!

NRG Pro II takes-off and lands at slower speed than you would expect, making flying easy. All thanks to new highly efficient reflex profile.

NRG Pro II will excite every experienced pilot - you will be infected by the racing virus instantly. The adrenaline rush will go through the roof and your heart rate will match the speed of the wing.

NRG Pro II purpose built for speed and agility to win the race, or just for low level ground skimming and fun.

WARNING: DO NOT! test fly this wing, unless you are ready to buy it!
This wing is highly addictive!





2 NRG XC II

NRG XC was designed on the foundations of the NRG PRO. It has the same advantages of a professional slalom racing wing in a XC oriented package!

It is a small, safe wing that allows fast flying for cross country ventures, expanding the possibilities for any experienced pilot.

NRG XC II is a second generation of NRG XC, improved in all parameters of the wing.

One of the main upgrades we made was incorporation of the **ABS®** - Automatic Balance System - Industry first, pioneered by APCO.

Following the market feedback from Force II about **ABS®**, it was the natural next step for NRG XC. It improved the wing dramatically, shaping it as an even better XC oriented wing and polarizing the difference between flying at trim speed and accelerated flight.

At trim speed - always restless, super agile, fast wing with quick responses and incredible flying rush.

At accelerated flight the **ABS®** system comes into play automatically - generating a stable, efficient cross country machine.

ABS® is a system which automatically and gradually pulls down the tip steering as you release the trimmers and push the speed bar. This action stabilizes the wing, cancelling roll movement, "planting" the pilot under the center of the canopy.

This outstanding roll stability gives the pilot the best and most efficient flying path at high speeds! It is on cross country flights or when chasing down a friend that the **ABS®** system comes into play.

The **ABS®** system will get you from point A to B in the fastest way possible with no pilot input.

On trim speed, the system is not activated, allowing dynamic flight tuned for thrill and agility as should be with a true slalom racing wing.

With the **ABS®** tip steering handles together with the main 2D brakes in hand your every touch will be rewarded with an energetic and precise response, satisfying even the most demanding pilots!

Additional difference between the XC and the PRO is the line set. The **NRG XC II** uses sheathed lines for improved durability on harsh take-off surfaces. Top lines are life-time warrantied, embedded hook-in points **EHP®** for improved aerodynamics.

The **SRS®** system will come into play whenever the pilot makes an error that causes stall behavior. It will automatically protect the pilot by lowering the angle of attack if the wing goes into a stall/parachute/spin.

We have recently received warm praise from a pilot noticing how the SRS® saved him from stall/spin situation when exiting a spiral incorrectly. [See video »](#)

NRG XC II takes-off and lands at slower speed than you would expect, making flying easy. All thanks to new highly efficient reflex profile.

NRG XC II will excite every experienced pilot - you will be infected by the xc racing virus instantly.

NRG XC II purpose built for speed and agility, fun flying, and long distance speed racing.

WARNING: DO NOT! test fly this wing, unless you are ready to buy it!
This wing is highly addictive!




3 DETAILED COMPARISON (XC II vs. PRO II)

	NRG XC II	NRG PRO II
Description	<p>Cross Country wing - easy to handle, take-off and land.</p> <ul style="list-style-type: none"> Fast and agile at trim speed. Stable and more relaxed in any accelerated flight mode (trimmers or speed bar) 	<p>Slalom racing wing – extremely manoeuvrable and responsive wing. Designed to allow the fastest possible transition between trim speed to fully accelerated and back to trim speed. Highly defined and pronounced reflex profile for safety in extreme flying.</p>
Aimed at	<p>Experienced pilots, looking for a thrilling cross country wing which delivers more speed and adrenalin than the average xc wing.</p>	<p>Very experienced pilots/professionals who can handle its responsiveness to the lightest of input.</p> <p>Pilots looking for the ultimate paramotor wing for slalom racing/ACRO flying/adrenalin.</p>
Build differences	Fully sheathed lines for easy handling and durability	Unsheathed competition lines for maximum performance.

Unique Features

ABS - Automatic Balance System	✓ - improved stability in accelerated flight	□ - Removed for the highest agility at any flight speed
SRS – Stall Resistance System	✓ - Easier launch and safety due to stall resistance	X - Removed for quicker transition from trim speed to accelerated and back to trim speed
Tip Steering handles	✓ - Included as standard. Additional steering option for ease of use in XC flights	X - Removed for use with 2D system only for maximum agility and wing control
2D Steering	□	✓
WSS - Wind Scoop System	✓	✓
EHP - Embedded hook in point	✓	✓
OAA – One Action Acceleration	✓	✓
HIT Valves	✓	✓
Flexon battens	✓	✓
Ball bearing pulleys	✓	✓



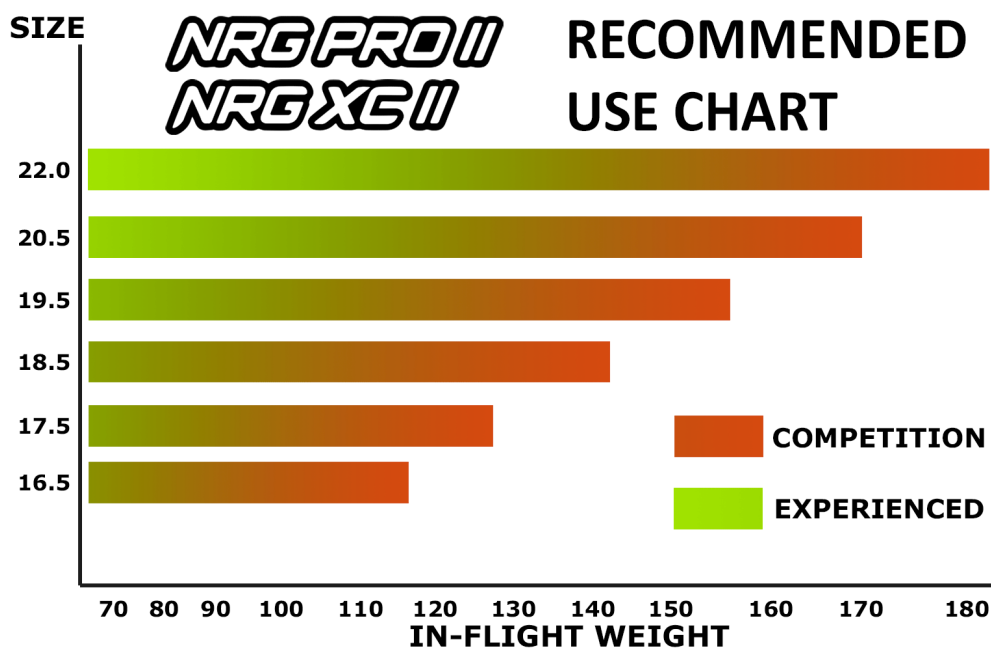

Pascal Vallée of ADVENTURE PARAMOTORS on the NRG PRO II 19.5 at Masada, Israel.



4 NRG PRO II TECHNICAL DATA

Size	16.5	17.5	18.5	19.5	20.5	22.0
Cells	50	52	54	50	52	54
Area m ²	16.52	17.5	18.48	19.47	20.5	21.80
Area (projected) m ²	13.81	14.63	15.45	16.27	17.14	18.22
Span (incl. Stabiliser) m	9.57	10.05	10.53	10.39	10.91	11.43
Span (projected) m	7.49	7.86	8.24	8.13	8.53	8.95
Aspect Ratio	5.55	5.77	5.99	5.55	5.77	5.99
Aspect Ratio (projected)	4.06	4.22	4.38	4.06	4.22	4.38
Pilot Weight (all up) free flight [kg]	70-90	70-100	70-110	70 - 120	70 - 130	70-140
Pilot Weight (all up + paramotor unit) [kg]	80-105	90-125	100-140	110-155	120-170	130-180
Weight of Canopy Kg	4.18*	4.45*	4.72*	4.92*	5.21*	5.57*
Root Cord m	2.07	2.07	2.07	2.25	2.25	2.25
Tip Cord m	0.4	0.4	0.4	0.44	0.44	0.44
Length of Lines on B m	5.78	6.03	6.28	6.27	6.55	6.82
Total length of line used m	305	325	348	331	353	378

*Approximate Weight

CERTIFICATION	DGAC	DGAC	DGAC	DGAC	DGAC	DGAC
----------------------	------	------	------	------	------	------

LINE MATERIALS	Material	Diameter	Strength
Top	Dyneema	1.0mm	90kg
Mid; (a1,b1,c1,d1)	Vektran	1.0mm	153kg
Mid;,a,b,c,d,**Brake	Vektran	0.9mm	115kg
Bottom A3;A5;B3;B5	Super Aramid	1.4mm	254kg
Bottom A1;B1	Super Aramid	1.6mm	325kg
Bottom C,D,St	Super Aramid	1.0mm	137kg
Brake Cascades; st top	Vektran	0.6mm	50kg
Steering Lines	Polyester	2.0mm	85kg

**See Line Table

FABRIC	
Sail Cloth	"Zero Porosity" Ripstop Nylon

PERFORMANCE DATA	
V-min.	27km/h
V-trim (-) / V-trim (0)	39/48 km/h
V-trim off	56 km/h
V-max.	77 km/h
Min Sink (at optimum wing loading)	1.4 m/s



5 NRG XC II TECHNICAL DATA

Size	16.5	17.5	18.5	19.5	20.5	22.0
Cells	50	52	54	50	52	54
Area m ²	16.52	17.5	18.48	19.47	20.5	21.80
Area (projected) m ²	13.81	14.63	15.45	16.27	17.14	18.22
Span (incl. Stabiliser) m	9.57	10.05	10.53	10.39	10.91	11.43
Span (projected) m	7.49	7.86	8.24	8.13	8.53	8.95
Aspect Ratio	5.55	5.77	5.99	5.55	5.77	5.99
Aspect Ratio (projected)	4.06	4.22	4.38	4.06	4.22	4.38
Pilot Weight (all up) free flight [kg]	70-90	70-100	70-110	70 – 120	70 - 130	70-140
Pilot Weight (all up + paramotor unit)[kg]	80-105	90-125	100-140	110-155	120-170	130-185
Weight of Canopy Kg	4.18*	4.45*	4.72*	4.92*	5.21*	5.57*
Root Cord m	2.07	2.07	2.07	2.25	2.25	2.25
Tip Cord m	0.4	0.4	0.4	0.44	0.44	0.44
Length of Lines on B m	5.78	6.03	6.28	6.27	6.55	6.82
Total length of line used m	305	325	348	331	353	378

*Approximate Weight

CERTIFICATION	DGAC	DGAC	DGAC	DGAC	DGAC	DGAC
---------------	------	------	------	------	------	------

LINE MATERIALS	Material	Diameter	Strength
Top	Dyneema	1.0mm	90kg
Mid; (a1,b1,c1,d1)	Super Aramid	1.5mm	150kg
Mid; ,a,b,c,d,St	Super Aramid	1.2mm	120kg
Bottom A3;A5;B3;B5	Super Aramid	1.8mm	230kg
Bottom A1;B1	Super Aramid	1.9mm	320kg
Bottom C,D,St	Super Aramid	1.5mm	150kg
Brake Cascades; st top	Dyneema	1.1mm	95kg
Steering Lines	Polyester	2.0mm	85kg

FABRIC	
Sail Cloth	"Zero Porosity" Ripstop Nylon

PERFORMANCE DATA	
V-min.	27km/h
V-trim (-) / V-trim (0)	39/48 km/h
V-trim off	56 km/h
V-max.	77 km/h
Min Sink (at optimum wing loading)	1.4 m/s



6 DISCLAIMER OF LIABILITY

Taking into consideration the inherent risk in paragliding or hang gliding, (free flying and motorized), it must be expressly understood that the manufacturer and seller do not assume any responsibility for accidents, losses and direct or indirect damage following the use or misuse of this product.

APCO Aviation Ltd. is engaged in the manufacture and sale of hang gliding, paragliding, motorized Para/hang gliding and emergency parachute equipment.

This equipment should be used under proper conditions and after proper instruction from a qualified instructor. APCO Aviation Ltd. has no control over the use of this equipment and a person using this equipment assumes all risks of damage or injury.

APCO Aviation Ltd. disclaims any liability or responsibility for injuries or damages resulting from the use of this equipment.

The glider is designed to perform in the frame of the required class as certified.

7 CONSTRUCTION

The glider is constructed with a top and bottom surface, connected by ribs.

One top and bottom panel, together with the connecting ribs is called a cell.

Each cell has an opening on the front lower part. The cells fill with air forcing the panels to take the shape dictated by the airfoil (rib) section.

On either side the wing ends in a stabilizer or wing tip, which provides straight-line (Yaw) stability and produces some outward lift to keep the span-wise tension.

The front part of the ribs use APCO's FLEXON batten system to keep the leading edge shaped at high speeds and in turbulent air. They also improve the performance and the launch characteristics of the glider.

The line hook-up points are made of Dyneema and imbedded in the bottom surface of the wing for minimal drag and maximum performance.

8 MATERIALS

The glider is made from tear resistant Ripstop Nylon cloth, which is P.U. coated to zero porosity and then siliconized to give the fabric high resistance to the elements. Different cloth is used for the top, bottom and ribs due to their different functions.

The lines are made of superaramid covered with a polyester sheath for protection against UV, wear and abrasion.

The bottom section of the brake lines are made of polyester because of its better mechanical properties.




The maillon quick links that attach the lines to the risers are made of stainless steel.

9 FLEXON® Batten system:

New generation FLEXON® batten system incorporated (see below) in the leading edge of the ribs, insuring perfect profile shape (instead of traditional Mylar reinforcement). FLEXON® battens reduce the weight of the glider by an additional 500gr. and unlike Mylar reinforcement will guarantee no deterioration in performance or launch.

Additional advantage of FLEXON batten is that it is practically indestructible, safeguarding the performance and launch over the lifespan of the glider.

How it Works:

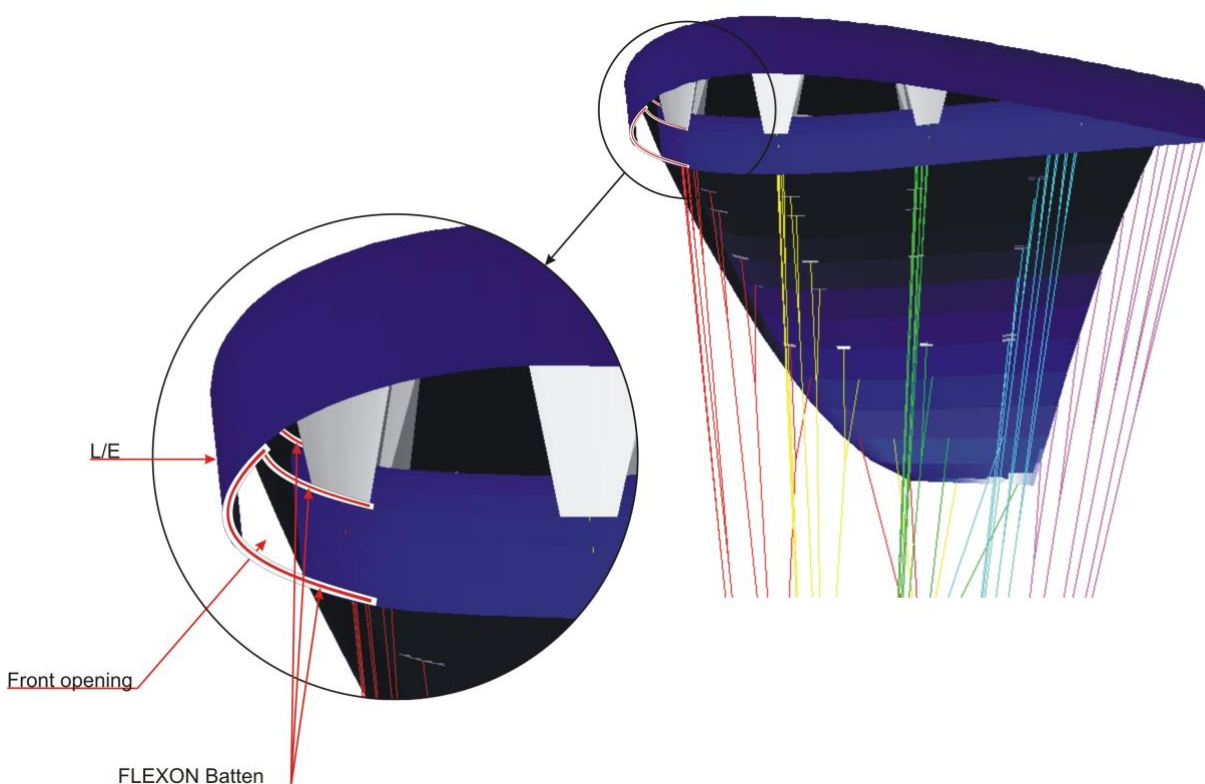

10 TRIMMING

All Apco gliders are trimmed for optimum performance combined with unsurpassed safety. It is very important not to re-trim or tamper with any of the lines or risers as this may alter the performance and safety. Trimming of the brake line should be done in accordance with this manual and carefully checked before flying.





11 HARNESS

All of Apco's gliders are developed with the use of ABS (Automatic Bracing System) type harnesses without cross bracing. We recommend the use of an ABS harness with all our gliders. All certified harnesses can be used with our gliders. For best safety and performance we recommend an Apco harness equipped with a Mayday emergency parachute.

CAUTION:

WE RECOMMEND NOT TO USE CROSS BRACING STRAPS.

APCO GLIDERS ARE DEVELOPED AND TESTED WITHOUT THE USE OF CROSS BRACING. USING AN ABS HARNESS WITH CHEST STRAP SET AT THE SPECIFIED WIDTH (CHECK THE CERTIFICATION STICKER ON YOUR GLIDER) WILL RESULT IN THE HIGHEST PASSIVE SAFETY ON YOUR GLIDER.

12 SPEED SYSTEM

12.1 ASSEMBLY & ADJUSTMENT

Apco gliders are supplied with a speed system compatible with most harnesses on the market today. Follow your Harness Manual for connecting your speed system. Do a hang test to ensure that the adjustment is correct. Flying with a speed system adjusted too short will cause it to be applied all the time, which can be dangerous.

WARNING:

The use of the speed system in turbulent conditions or close to the ground is dangerous. While flying with the accelerator, the glider has a reduced angle of attack and is therefore more susceptible to turbulence and may collapse or partially deflate. Gliders react faster when accelerated and may turn more. The accelerator should immediately be released in this case.

13 EMERGENCY PARACHUTE ATTACHMENT

It is recommended to use a certified rescue parachute when flying. Attaching the rescue parachute should be done in accordance with the recommendation of the harness and reserve parachute manufacturer.

14 RISERS

The NRG PRO II is supplied with risers featuring a split A riser. The 1st A-riser attaches to the central two A lines (A1 & A3). The second A-riser is attached to the outermost A line (A5). At no time should the pilot change the risers or use risers not intended for this specific glider as this will affect the performance and safety of the glider.


The riser is equipped with both an accelerator and trimmers with two hook-in points to accommodate torque compensation for left and right prop rotation






The brake line is guided through upper pulley for low hook in point harnesses and adjusted as per Section 16.2(see Figure 16-1).

For high hook in harnesses use the same brake line setting guiding the brake line through the lower brake guide pulley position.

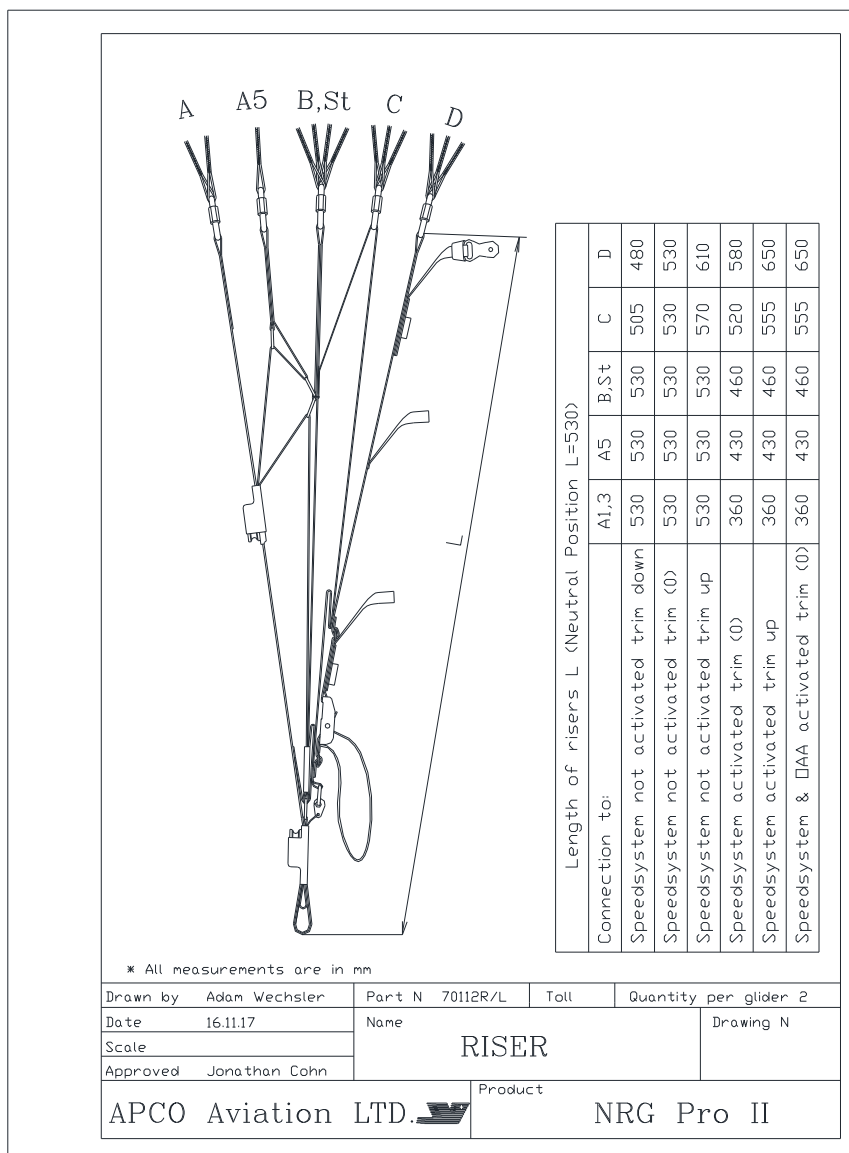

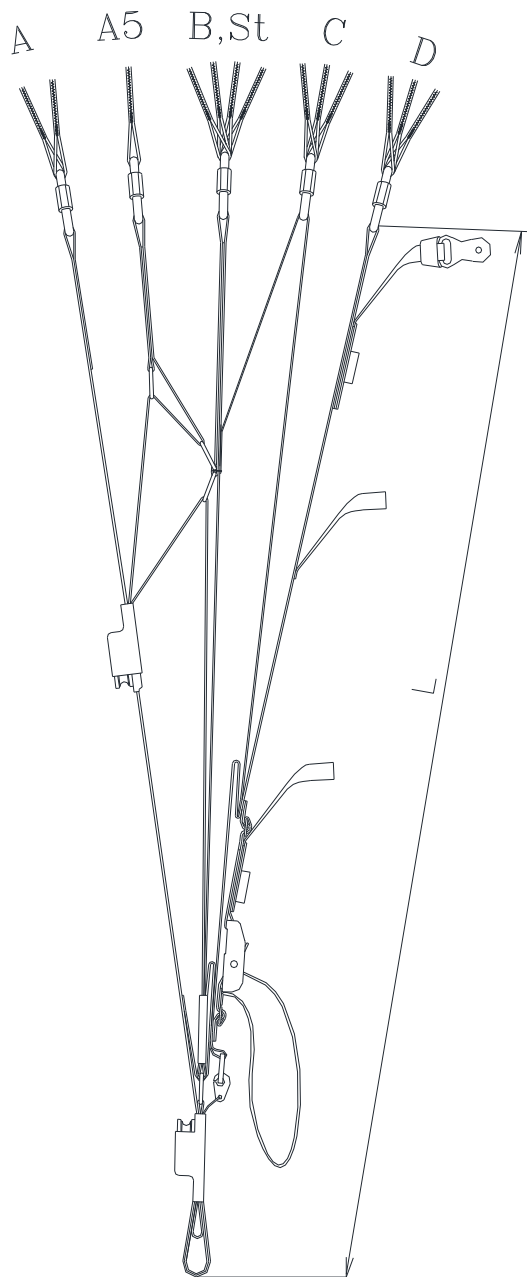

Length of risers L (Neutral Position L=530)					
Connection to:	A1,3	A5	B,St	C	D
Speedsystem not activated trim down	530	530	530	505	480
Speedsystem not activated trim <0>	530	530	530	530	530
Speedsystem not activated trim up	530	530	530	570	610
Speedsystem activated trim <0>	360	430	460	520	580
Speedsystem activated trim up	360	430	460	555	650
Speedsystem & □AA activated trim <0>	360	430	460	555	650

* All measurements are in mm

Drawn by	Adam Wechsler	Part N	70120R/L	Toll	Quantity per glider 2
Date	16.11.17	Name RISER			Drawing N
Scale					
Approved	Jonathan Cohn				
APCO Aviation LTD. 				Product	NRG XC II




15 TRIMMERS

The NRG PRO II risers are equipped with replaceable trimmers for accelerated flight. The neutral setting is when the A/B/C riser lengths are equal.

Trimmers should be used when higher speed is required and you wish to accelerate the glider.

Replaceable trimmer system

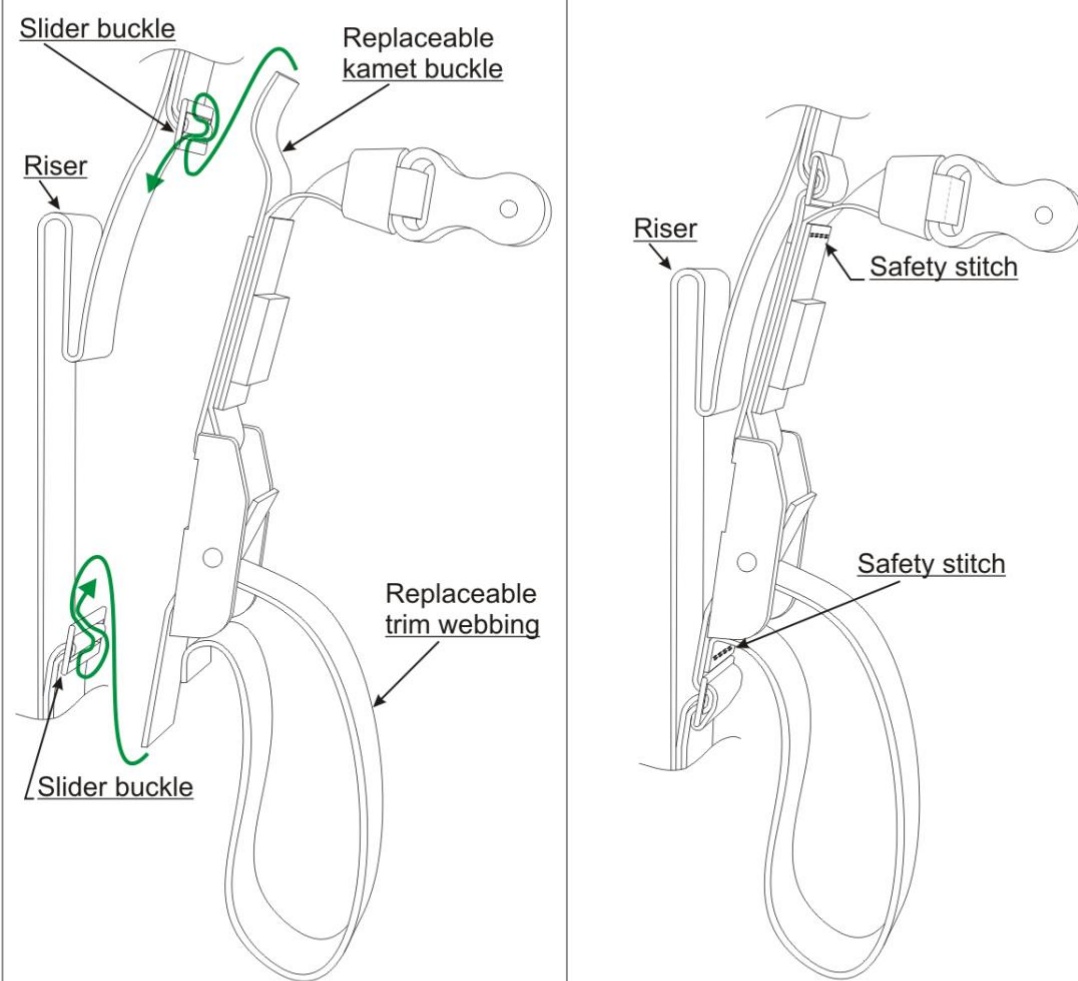

1. Undo the safety stitch of kamet or trim webbing, depending on what requires replacement.
2. Take out the kamet or trim webbing requiring replacement, by removing it from the slider buckle.
3. Replace trim webbing or kamet with new by guiding it back through the slider buckle, verify the trim range is unchanged, on trim speed all the riser branches are at equal height. When kamet fully released it should not retain any load (all the load is on the fully released D branch of the riser).
4. Restitch the safety stitch to lock the configuration of the trim in place.



16 OAA (One Action Acceleration)

OAA is an innovative system that stands for "One action acceleration system - OAA".


The OAA allows pilots to simultaneously operate both the speed system and the trimmer for optimized angle of attack at any given speed. With OAA, when using the speed system, the trimmers are released gradually according to the position of the speed bar. This allows for a larger speed range that can be fully used in one swift action of the speed bar.

In order to engage the OAA one must detach the Brummel hooks connected to the rear risers below the trimmers. **Prior to using the speed system one must move the trimmers to the neutral position (all risers level).**


To disengage the OAA one must reattach the Brummel hooks on the rear riser.

When operating the speed system with the OAA disengaged one must release the trimmers open before activating the speed system.

One Action Acceleration OAA

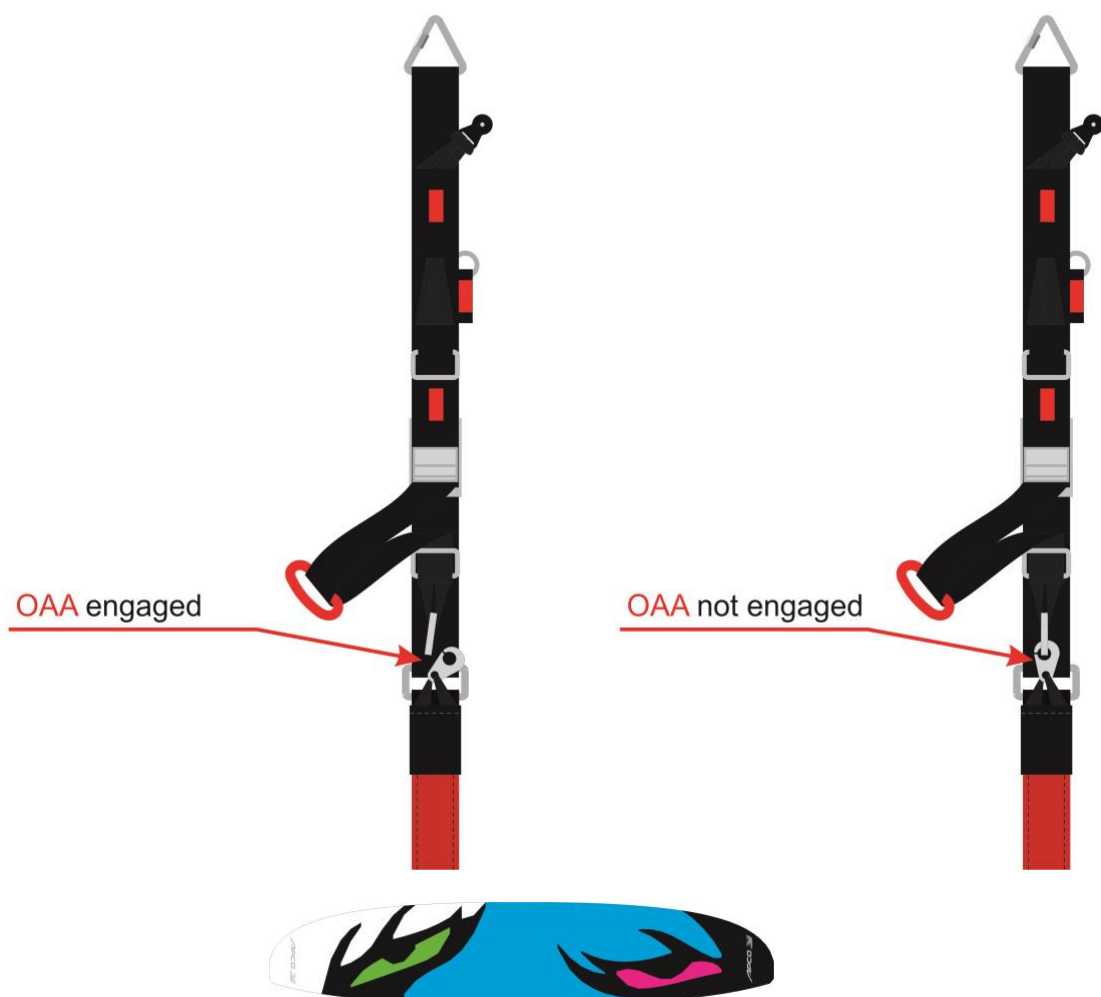

17 HIT VALVES (High speed In-Take)

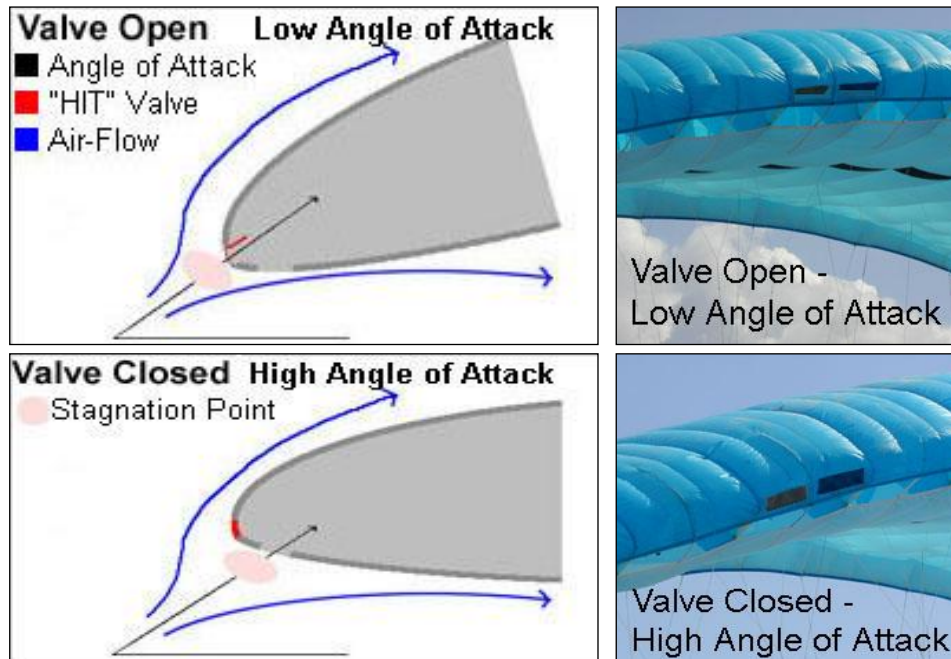

The NRG PRO II is equipped with an Active HIT Valve system (patent pending) to improve the overall performance and safety of the wing especially during accelerated flight.

The valve system allows maximum inflow of air when the glider acquires a lower angle of attack while accelerated. HIT valves open and close in flight to increase the internal pressure of the glider.

For the valves to work properly it is important to keep them wrinkle free especially in sub zero temperatures. Make sure the valves are lying flat and are in the closed position when you fold the glider. Before launch the pilot should check all the valves and verify that they are flat and cover the entire area of the mesh opening. Creased and wrinkled valves will not adversely affect the safety of the wing.




18 SRS – Stall Recovery System

The **NRG XC II** features a new, innovative, riser design allowing the pilot to slow down the glider to minimum speed without risking getting caught in deep stall (parachutal). The **SRS** (patent pending) takes advantage of simple yet proven aeronautical and physical principles.

When flying, most of the load is applied to the front third of the wing. This means that the A lines bear significantly more load than the C+D lines together. However, when the glider is in deep stall (parachutal), the load is distributed almost evenly along the wing chord. Thus, in parachutal, the load on the C+D lines is considerably higher than on the A lines. Using this principle, we designed a self-compensating angle of attack (AofA) system based on a sliding riser concept.

The C+D riser join the A risers and slide in opposite direction. In flight, the A riser is taut and pulls the C+D to trim position. When forced into parachutal, The C+D riser elevate and pull down the A riser, accelerating the glider out of parachutal. Once recovered, the risers automatically resume trim position.

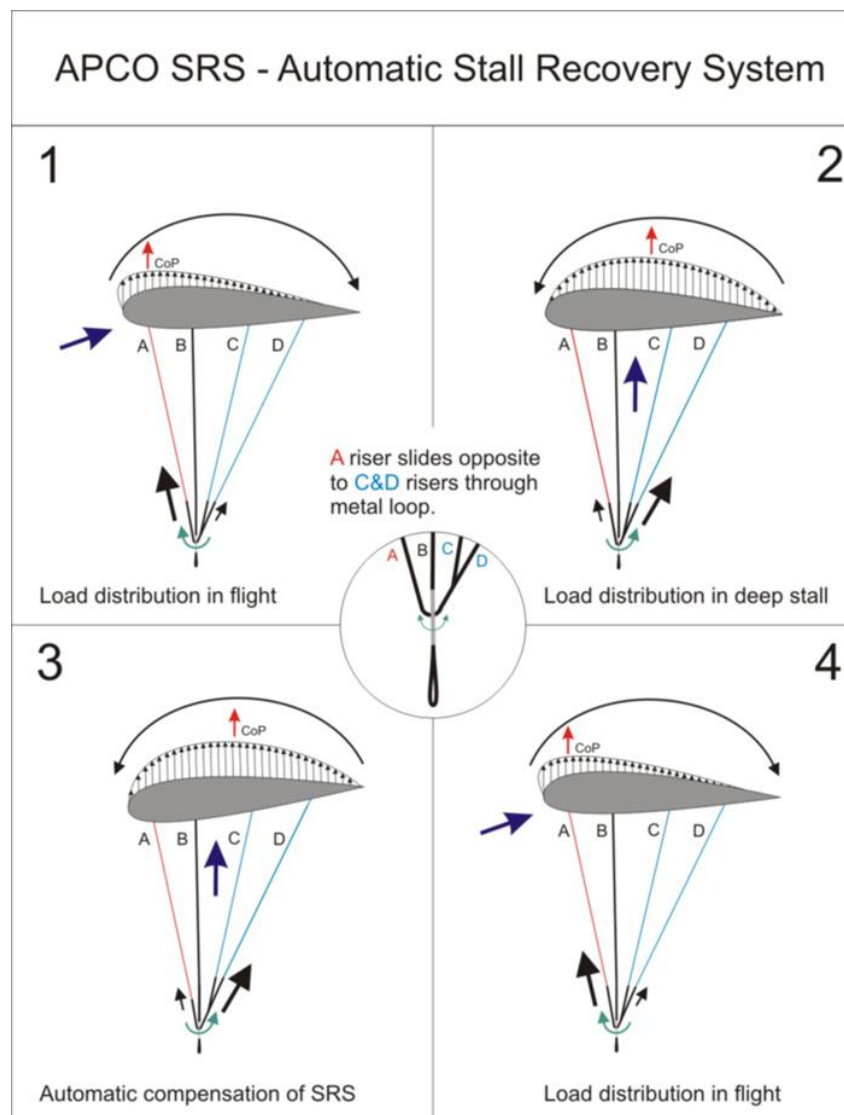



1 ABS - Automatic Balance System (on NRG XC II)

Industry first, pioneered by APCO. ABS is a system which automatically and gradually pulls down the tip steering as you release the trimmers and or push the speed bar. This action stabilizes the wing, cancelling roll movement, "planting" the pilot under the center of the canopy.

The system operates automatically and there is no need for the pilot to activate it. The system integrates the tip steering handles, which are held by magnets and press buttons. It is recommended to secure the press buttons after each landing to avoid clutter. ***The system comes tuned from the factory, It is Not recommended to change the location of the contacts (Knots on the ABS lines).**

2 INSPECTION

2.1 GENERAL

Pilots, please insure that your glider has been test flown and fully checked by your dealer before taking it into your possession.

Verify that the dealer checked and confirms that the glider is airworthy.

In case of use of the wing in combination with trike:

Due to the very wide assortment of trikes on the market with different set up and design, it is necessary to verify that the specific trike can be successfully coupled with the wing.

Please make sure your dealer performs the following procedures before first flight:

A. It was checked with APCO that the specific trike can be flown with your new wing.

In case the specific combination is not checked by APCO – your dealer must take the following necessary steps:

B. Wing to be fully inspected by the dealer as in the paragraph above

C. Wing to be ground handled and visually checked while inflated.

D. Connection method to the trike is in line with APCO's recommendation according to the sketch below. Pilot can reach both main brake handles and tip steering handles (if available).

E. Before first take-off perform "taxiing" test on the ground slowly rolling with the wing checking all aspects of the set-up without actually taking off. (Including Roll/yaw stability, pitch stability, stall tendency, brake response etc.)

F. Only once the wing passes the taxiing test – then the next step is to make the actual test flight to make sure trike and wing are correctly coupled and the system is airworthy.

G. Take the wing into your possession only after your dealer confirms that wing is airworthy when coupled with your trike.




3 ANNUAL / PERIODICAL AIRWORTHINESS INSPECTION

It is highly recommended that your glider (and other equipment), undergo a Periodical Airworthiness Inspection which is to be done by Apco, or an Apco approved / appointed service centre.

This is recommended to be done every 24 months or every 100 hours, whichever comes first. This recommendation is in line with Israeli regulations, binding in Israel. as an alternative, we suggest for you to follow the regulations set by your national authorities.

POROSITY:

Porosity is measured with a calibrated Porosimeter. It should be measured in at least 5 different places on the upper surface. Below is an example of the sections we test at Apco. The upper surface, at 20-35% chord (from L/E) is most prone to becoming porous, and is thus the most important section to test. It is also important to test the different cloth types, and different colours used.

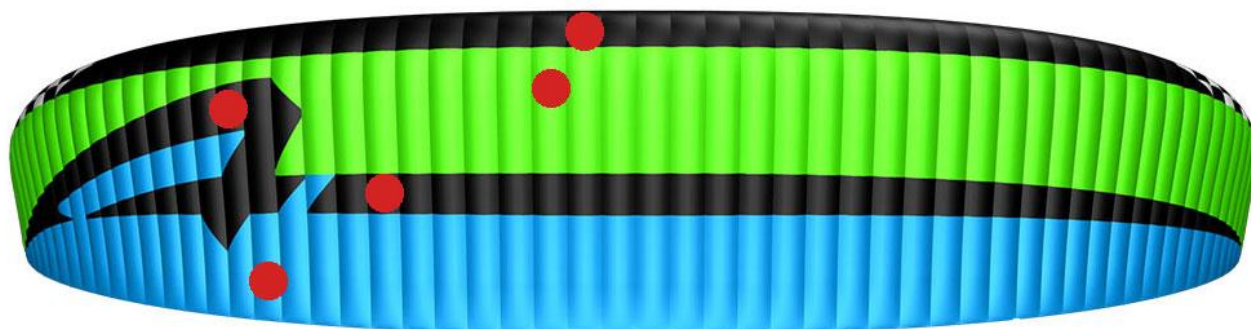

LINE MAINTENANCE

Superaramide lines are known to be sensitive to the influence of the elements. They must be carefully inspected periodically. In his/her own interest, the pilot must observe the following points to ensure maximum performance and safety from the glider. Avoid sharp bending and squeezing of lines. Take care that people do not step on the lines. Do not pull on the lines if they are caught on rocks or vegetation. Avoid getting the lines wet. If they do get wet, dry them as soon as possible at room temperature and never store them wet.

One line of each line group (a, b, c, upper and lower) must be tested for minimum 50% of the rated strength. if the line fails under the load test or does not return to its specified length all the corresponding lines must be replaced. never replace lines with different diameter or type of lines as all gliders were flight and load tested for safety in their original configuration. Changing line diameter/strengths can have dangerous / fatal consequences.

Professional use of gliders: towing, tandem, schooling and competition flying requires more frequent line inspection and replacement of A, B, C, D and brake lines. [For replacement lines please refer to our online direct line services.](#)



4 BEFORE THE FIRST FLIGHT

BRAKE SETTING



Before the first flight the pilot / dealer has to inflate the glider in the flight configuration, on the intended frame, to check and if needed, adjust the brake line length as required. It is important that the brakes are not set too short. If the glider is above your head the brakes should have about 10 cm of free travel in the brake from the brake guide on the riser to the activation point of the brakes (See Diagram). If the pilot changes the type of paramotor, please check the brakes again to ensure that the brakes are not too short.

Since there are several hook-up point configurations on paramotors, the F1 comes with longer brake lines to allow for adjustment to your requirements, however, this should only involve lengthening not shortening.

Shortening the brakes will cause them to be too short when accelerating the wing, which can be both dangerous, and inefficient. The excess lines should be trimmed or taped or stowed in a safe manner so that they do not increase the chance of the brakes getting pulled through the mesh into the propeller.



4.1 Brake Operation

4.2 FIRST CHECK AND PREFLIGHT INSPECTION

With every new glider, the following points should be checked:

- Connection points between the glider and the harness.
- Check that there are no lines twisted, tangled or knotted.
- Check that the risers and speed-system are hooked up to the harness correctly.
- Check that the trimmers are set to the neutral position or below.

4.3 REGULAR INSPECTION CHECKS

- Damage to lines, webbing and thread on the stitching of the harness and risers.
- The stainless steel connection links on the risers are not damaged and are fully closed.
- The pulleys of the speed system are free to move and the lines are not twisted.
- The condition of the brake lines, stainless steel rings and the security of the knot attaching the brake handle to the brake line.
- The sewing and connection of the lines.
- Damage to hook up points on the glider.
- Internal damage to the ribs and diagonal ribs.
- Damage to the top and bottom panels and seams between panels.

4.4 LINE MAINTENANCE

Several groups of suspension lines and one brake line are attached to each riser. The groups are called A, B, C, D and brake lines. The stabilizer lines are connected along with the A-lines. Superaramid lines are known to be sensitive to the influence of the elements. They must be carefully inspected periodically. In his/her own interest, the pilot must observe the following points to ensure maximum performance and safety from the glider.

- Avoid sharp bending and squeezing of lines.
- Take care that people do not step on the lines.





- Do not pull or jerk the lines if they are caught on rocks or vegetation.
- Avoid getting the lines wet. If they do get wet, dry them as soon as possible at room temperature and never store them wet. Never fly with wet lines as their tensile strength will be temporarily reduced.

IT IS **STRICTLY RECOMMENDED** TO CHECK THE LINES ON EVERY PARAGLIDER ONCE A YEAR OR EVERY 100 HOURS, WHICHEVER COMES FIRST.

ONE OF EACH A, B, C AND D LINE MUST BE TESTED FOR MINIMUM 50% OF THE RATED STRENGTH. IF THE LINE FAILS UNDER THE LOAD TEST OR DOES NOT RETURN TO ITS SPECIFIED LENGTH ALL THE CORRESPONDING LINES MUST BE REPLACED. THIS RECOMMENDATION IS IN LINE WITH ISRAELI REGULATIONS, BINDING IN ISRAEL.

AS AN ALTERNATIVE, WE SUGGEST FOR YOU TO FOLLOW THE REGULATIONS SET BY YOUR NATIONAL AUTHORITIES WITH REGARD TO LINE MAINTENANCE AND REPLACEMENT.

NEVER REPLACE THE LINES WITH DIFFERENT DIAMETER OR TYPE OF LINES AS ALL GLIDERS WERE LOAD TESTED FOR SAFETY IN THEIR ORIGINAL CONFIGURATION. CHANGING LINE DIAMETER/STRENGTHS CAN HAVE FATAL CONSEQUENCES.

Professional use of gliders: towing, tandem, schooling and competition flying requires more frequent line inspection and replacement of A, B, C, D and brake lines.

[For replacement lines please refer to our online direct line services.](#)

5 PARAGLIDING

The NRG PRO II/NRG XC II are designed as a Paramotor Slalom/Comp wings and **ARE NOT** recommended for Free Flying.

5.1 TAKE OFF

As this is not a training manual we will not try to teach you launching techniques. We will only briefly go through the different launch techniques to help you get the most out of your glider.

5.1.1 LAYOUT

Pre-flight check should be done before every flight.

Spread the glider on the ground. Spread the lines, dividing them into eight groups A, B, C, D and brake lines left and right. Make sure the lines are free and not twisted or knotted.

Make sure all the lines are on top of the glider and none are caught on vegetation or rocks under the glider. Lay out the glider in a horseshoe shape. This method insures that all the lines are equally tensioned on launch, and results in an even inflation.



The Flexon rib reinforcements will keep the leading edge open for easy inflation.

The most common reason for a bad launch is a bad layout!

5.1.2 ALPINE LAUNCH OR FORWARD LAUNCH

The NRG PRO II has very good launch behaviour in no wind conditions.

For the best results we recommend the use of the following techniques: Lay out the glider and position yourself in the centre of the wing with the lines almost tight.

With a positive and constant force inflate the wing holding only the A-risers, and smoothly increase your running speed. The wing will quickly inflate and settle above your head without the tendency to stick behind.

After you leave the A-risers, apply about 15% brakes and the NRG PRO II will gently lift you off the ground.

5.1.3 STRONG WIND AND REVERSE LAUNCH

The NRG PRO II has a lot of lifting power and care should be taken in strong wind. It is advisable to have an assistant hold you when attempting a strong wind launch. It also helps if you walk towards the wing and leave the A-riser just before the glider gets above your head.

The assistant should let you walk in under the wing on inflation rather than resist the inflation; this reduces the tendency of the glider to lift the pilot prematurely.

5.1.4 TOW OR WINCH LAUNCHING

All APCO gliders are well suited for winching and have no bad tendencies on the winch. With towing it is important to have the wing above your head on launch and not to try and force a stalled wing into the air. This is especially important if the winch operator is using high tension on the winch. Very little brake if any need be applied on launch and during the tow. Directional changes can be made with weight shift rather than brakes. While on tow, the brake pressure will be higher and more force may be needed to make corrections than in normal flight.

For all our gliders we recommend using tow accelerating system. There are different types existing on the market. Please check with your dealer or tow operator for the recommended tow accelerator system. Use of it will eliminate any chance for accidental stalling on tow.

5.2 FLIGHT TECHNIQUES

5.2.1 FLYING SPEED

Indicated trim speed is dependent on the amount of brake the pilot is using, wing loading, altitude above sea level and the accuracy and make of speed probe. The speeds recorded



in technical data were at optimum wing loading at sea level using a Flytec 6030 thus there could be a slight variation in speed range numbers that pilots records.

Speed readings in the flight reports could differ as this was measured during testing using various instruments and is an indication of the difference between trim, stall and top speed. The speed range will be the same but the actual numbers may differ.

- With 0% brake and trimmers at 0 the NRG PRO II will fly at 39-48 km/h with a sink rate of 1.7m/s.
- At 25% brake the glider will fly at 33-34km/h with minimum sink rate 1.4 m/s.
- The best glide angle is achieved with 0% brakes and 0% speed system.
- With 80% brake the glider will fly at about 29km/h and will be close to the stall point 27km/h.

CAUTION:

APART FROM WHEN FLARING AT LANDING THERE SHOULD BE NO REASON TO FLY WITH 70% TO 100% BRAKE. THE SINK RATE OF THE GLIDER WILL BE EXCESSIVE AND THERE WILL BE A POSSIBILITY OF ENTERING A DEEP STALL OR FULL STALL SITUATION. THERE IS ALSO THE RISK OF GOING NEGATIVE OR ENTERING A SPIN WHEN ATTEMPTING TO TURN THE GLIDER NEAR THE STALL SPEED.

WARNING:

The use of the speed system in turbulent conditions or close to the ground is dangerous. While flying with the accelerator, the glider has a reduced angle of attack and is therefore more susceptible to turbulence and may collapse or partially deflate. Gliders react faster when accelerated and may turn more. The accelerator should immediately be released in this case.

5.2.2 THERMAL FLYING

NRG PRO II/NRG XC II has high internal pressure and needs very little pilot input even in very turbulent conditions.

In light lift it is advised to make flat turns to keep the glider from banking too much and avoid increasing the sink rate.

In strong lift conditions it is most effective to make small turns in the core with relatively high bank.

For the best climb rate in ridge lift we recommend using about 15% to 20% brake and trimmer fully closed.

5.2.3 ASYMMETRIC COLLAPSE

If one side of the glider partially folds or collapses it is important to keep your flying direction by applying weight shift and some brake on the opposite side.

The wing should re-inflate on its own without any input from the pilot.

To help re-inflation it is possible to pull some brake on the collapsed side and release immediately.

In the event of a big deflation, i.e. 70%, it is important to apply brake on the inflated side of the wing, but care must be taken not to pull too much as you could stall the flying side.

The glider is very solid and has a strong tendency to re-inflate after collapse.



5.2.4 CRAVAT

In case a cravat should occur from an asymmetric collapse or other manoeuvres, it is important to keep your flying direction by applying some brake on the opposite side and then it can usually be opened by pulling down on the stabilo line of the affected side while countering the turn with the opposite brake and weight shift.

5.2.5 FRONT STALL OR SYMMETRIC COLLAPSE

In the event of a front stall the glider will normally re-inflate on its own immediately without any change of direction. To speed up re-inflation briefly apply 30%-40% brake (to pump open the leading edge). **Do not hold the brakes down** permanently to avoid an unwanted stall.

5.2.6 B-STALL

The NRG PRO II/NRG XC II has a very clean, stable B stall.

To enter the B stall the pilot has to pull the first 20-cm slowly until the glider loses forward speed and starts to descend vertically.

Then the pilot can pull more on the B until he/she attains a stable 7 to 9 m/s descent rate. The Glider has no tendency to front rosette or become pitch unstable. To exit the B stall the pilot releases the B slowly until the glider has regained its shape and then the **last 15 cm fast** to prevent the glider from entering deep stall.

The NRG PRO II/NRG XC II can be controlled directionally in the B stall by pulling more on one B riser than on the other to create a turn in any direction. The B-stall is a safe controlled way of losing altitude fast without any forward speed.

5.2.7 BIG EARS

Big ears manoeuvre is not available using the NRG PRO II/NRG XC II.

5.2.8 DEEP STALL OR PARACHUTAL STALL

Under normal flying conditions the NRG PRO II/NRG XC II will have no tendency to enter deep stall. All gliders can however under certain conditions enter and stay in deep stall configuration (as a result of ageing of materials, improper maintenance or pilot induced).

5.2.8.1 Signs of parachutal stall

- The pilot has very little or no forward airspeed and no wind in his face.
- The glider will be fully open but the cells will be bulging in and not out on the bottom surface.
- The glider might have a very slow turning sensation.
- You will have an increased vertical descent.

5.2.8.2 Exit from parachutal stall

It is important to recognize this situation. Most accidents involving parachutal stall happen because the pilot did not realize that he was in deep stall.

The best way to exit a parachutal stall is to pull all the A risers down to get the wing flying again. The pilot can pull the riser down until the wing starts to fly again. The moment the





wing starts to fly the pilot should release the A risers, or the wing might suffer a frontal collapse.

Alternatively the pilot can push the speed bar to lower the angle of attack and get the wing flying again.

By pulling one or both brakes while in deep stall the pilot can accidentally enter a full stall or spin. (Not recommended)

5.2.9 SPIRAL DIVES

The NRG PRO II/NRG XC II has very good behaviour in spiral and has no tendency to stick in the spiral. By progressively applying brake on one side the glider can be put into a spiral dive. Safe high sink rates can be achieved like this. The spiral has to be exited slowly by releasing the brake over one complete turn or the glider may pitch forward and possibly suffer a collapse.

**Care must be taken that the pilot has enough height to exit the spiral safely.
Sink rates in excess of 19m/s can be obtained.**

CAUTION:

SOME GLIDERS CAN BE NEUTRAL IN SPIRAL AND MAY NOT EXIT WITHOUT PILOT INPUT. TO EXIT A NEUTRAL SPIRAL THE PILOT HAS TO LEAN HIS/HER WEIGHT TO THE OUTSIDE OF THE TURN OR APPLY BRAKE INPUT TO TURN OUT OF THE SPIRAL (ON THE OUTSIDE WING). AS SOON AS THE GLIDER STARTS TO SLOW DOWN IN THE SPIRAL THE OUTSIDE BRAKE MUST BE RELEASED.

PILOTS CAN SUFFER BLACK OUTS IN SPIRALS AND THE PILOT HAS TO EXIT THE SPIRAL AS SOON AS he/she FEELS ANY ABNORMAL SYMPTOMS (Black dots in field of vision or light-headedness).

5.2.10 STRONG TURBULENCE

NEVER FLY IN STRONG TURBULENCE!

If you unexpectedly encounter strong turbulence, fly with **trimmers open and no brakes applied** to let the reflex stabilize the glider, use only secondary brake handles (tip steering) and land as soon as possible.

5.2.11 STEERING NOT FUNCTIONING

If the pilot cannot reach the brake or steering lines for any reason or if they are not functioning properly, (for example: If they break on a damaged point) the pilot can control the glider by pulling down on the rear risers.

Care must be taken when steering like this, as much less input is needed to turn the wing and the response of the wing is also much slower than when using the brakes.

IF YOU PULL TOO MUCH ON ONE OR BOTH RISERS THE GLIDER WILL SPIN OR STALL.





On the landing flare the pilot should be especially careful not to stall the glider too high.

5.2.12 LANDING

Before landing, the pilot should determine the wind direction, usually by checking a windsock, flags, smoke or your drift over the ground while doing one or more 360° turns.

- Always land into the wind.
- At a height of about 50 meters your landing setup should begin. The most commonly used one is to head into the wind and depending on the wind strength the pilot should reach his/her landing point by making s-turns.
- At a height of about 15 meters the final part of your descent should be made at trim speed into the wind.
- At a height between half a meter and one meter you can gently flare the glider by pulling gradually down on the brakes to the stall point. When top-landing it is sometimes not necessary to flare or a much smaller flare may be required, especially in strong ridge conditions.

5.2.13 TREE LANDING

If it is not possible to land in an open area, steer into the wind towards an unobstructed tree and do a normal landing approach as if the tree is your landing spot. Flare as for a normal landing. On impact hold your legs together and protect your face with your arms.

After any tree landing it is very important to check all the lines, line measurements, and the canopy for damage.

5.2.14 WATER LANDING

As you approach landing, release all the buckles (and cross-bracing if present) of the harness except for one leg. Just before landing, release the remaining buckle. It is advisable to enter the water downwind. Let the wing pitch completely forward until it hits the water with the leading edge openings; the air inside will then be trapped, forming a big air mattress and giving the pilot more time to escape. Less water will enter the canopy this way, making the recovery much easier. **Get away from the glider and lines as soon as possible**, to avoid entanglement. Remember that a ballast bag can be emptied and then inflated with air for a flotation aid.

The wing should be carefully inspected after a water landing, since it is very easy to cause internal damage to the ribs if the canopy is lifted while containing water. Always lift the canopy by the trailing edge, not by the lines or top or bottom surface fabric.

6 POWERED FLYING

NOTE: Before each start it is necessary to perform a complete check of the paraglider, harness and power unit.





In powered flight most of the wing characteristics remain as described above (Chapter 15). Still there is additional information needed, concerning power output, proper matching of the wing/engine/propeller etc. APCO can try to give advice on some possible tested combinations, but if you contact your nearest APCO dealer or frame manufacturer they will always be ready to help.

6.1 FIRST FLIGHTS

In order to get familiar with your wing we recommend flying with trimmers at the 0 position first in stable non-turbulent weather.

Once you feel confident with your wing, you can start experimenting with faster trim settings and speed system, taking all precaution. Learn to use all of the additional speed of the NRG PRO II/NRG XC II

Remember: do not exceed the envelope of weather, wing and other parameters to insure safe flying.

6.2 TAKE-OFF

6.2.1 FORWARD LAUNCH

Please check wind direction, even when it seems that there is no wind at all, there is always some drift.

Therefore be careful in determining the conditions, since in PPG flying it is most important that the launch and initial climb are performed with a head wind (the danger of losing your airspeed while crossing the wind gradient is greatly reduced).

Special attention must be paid to trees, power lines and other obstacles, including the possibility of emerging rotors.

Launch preparation

Lay out the paraglider in an arc, downwind of the power unit, with all suspension lines taut and pointing toward center of the power unit. The risers are to be laid on the ground.

Set the trimmers in 0 positions.

Make sure that you warm up the engine while standing windward of the wing. Stop the engine before clipping in the risers.

Now have quick checks if:

- Helmet is on and fastened.
- The risers are clipped into the carabiners.
- The trimmers are properly set.
- Propeller is clear.
- Speed system is functioning, problem free.
- Steering lines and handles are free and not twisted.
- The engine delivers full power.
- Take off area is clear of obstacles and free to use.

When you are sure all is OK, you can clip in the wing and execute launch as described in paragraph 17.1.2.

From now on you should steer / handle the paraglider facing forward, without looking back over your shoulder. If the wing is retreating and behind you at a low angle, do not turn





around as there is a danger of falling on your back and damaging the propeller and catching lines in the propeller, so it should be avoided.

During take-off, when you feel the tension on both risers to be equal, make sure the wing is overhead, open up full power and lean back to counter the engine thrust, so that it can push you forward rather than towards the ground.

The best option is not to use the brakes, allowing the paraglider to rise as it was laid out.

If it starts to deviate from its course, pull the opposite riser and run under the centre of the wing while continuing in the initial direction.

If the wind suddenly drops, give a strong pull on the risers.

If the paraglider falls to one side or back too far to lift again - kill the engine, cease launch and check the conditions once again.

As the wing rises, the forces grow lighter and it should stabilize above your head without overshooting.

This is the best moment to check if it is inflated well and the lines are not tangled, **but do not stop or turn.**

Once you feel the forces on the risers decrease, run faster and let go of the risers.

See if there is already any opposition on the brakes and, if necessary, use them to correct direction or to increase lift at take-off.

Remember:

- If the cage of your power unit is not stiff enough, the risers will strain during launch and can deform it to the extent of collision with the propeller. Before applying full throttle, see that the cage does not catch any lines.
- Any brake operation (or steering input in general) should be smooth and gentle.
- Do not try to take off until you have your wing overhead. Hitting power before that can cause dangerous oscillations.
- Do not sit in the harness (run) until you are sure you are flying!
- The faster the trim setting is, the more brake input is required to take off.

6.2.2 REVERSE LAUNCH (In strong wind)

Reverse launch can be executed holding in one hand both A risers and one brake, with throttle and the second brake in the other hand. A moderate wind is by far the best way. In weaker wind it is better to prepare for forward launch, as running backwards with an engine on your back is not an easy thing to do.

It is reasonable not to pull the wing up until you are really determined to launch, especially when it is clipped in.

Lay down the paraglider with its trailing edge against the wind.

Unfold the wing enough to find the risers and check that no lines are looped over the leading edge.





Stretch the risers against the wind, separating the right and left one.

We suggest that you lay the risers in the same way as you will be turning during reverse launch, and place one riser over the other, with rear risers on top.

It should be done this way because once you clip in, the cage of your power unit will make turning on your own very difficult.

Now run the pre-launch checklist.

After warming up the engine put the power unit on, turn to face the wing, go to the risers and clip them in the appropriate carabiners.

Pull on the front and rear risers to open the cells.

It is a good idea to pull up the wing briefly in order to check that the lines are not tangled.

Holding the risers, brakes and throttle as described above, pull the front risers and raise the wing over your head.

On most occasions you won't have to use the brakes.

Once you have it overhead, turn around, open the throttle and take off.

Remember:

- You are launching with your hands crossed. You have to perfect this technique before trying it with a running engine on your back.
- Any brake operation (or steering inputs in general) should be smooth and gentle.
- Do not try to take off until you have your wing overhead, applying the throttle early can cause dangerous oscillations.
- Do not sit in the harness until you are sure you are flying!
- The faster the trim setting is, the more brake input is required to take off.
- When clipping in the crossed risers, you can find proper connection of the speed system particularly hard. Be careful not to confuse the risers!

6.2.3 CLIMBING

Once you are safely airborne, continue heading against the wind, using brakes to correct the direction.

Do not try to climb too steeply.

In powered flight the NRG PRO II/NRG XC II behaves more like an airplane than a paraglider, and it is good idea to regard it as such. If there are no obstacles present, it is by far safer to fly level for a while after take-off, clearing the ground gradually, gaining some speed before converting it to height with a brief pull on the brakes.

Another reason not to try climbing too steeply is the risk connected with engine failure at low altitude.

NRG PRO II/NRG XC II in a steep climb does not stay behind as much as conventional paragliders.

The SRS prevents or delays possible stall, but low speed at low altitude carries inherent danger of stall which even SRS will not be able to fully prevent

Besides, you should always be able to land safely in case of engine malfunction, so it's





better not to take unnecessary risk and always fly with a safe margin of speed and height

Depending on the power unit geometry, it is possible that after take-off you will notice a propeller torque (known as P-factor).

It will try to turn you around, so counter-steer with a brake, trimmer set or harness cross-bracing.

NRG PRO II/NRG XC II'S risers feature two hook in points, to help adjusting your ppg setting against torque.

When climbing steeply with slow trim settings and high power output beware of the possibility of stall.

Due to considerable vertical distance between thrust axis and wing chord - the range of safe power operation is closely connected to your skills and equipment.

Power-unit induced oscillations:

Certain configurations of engine weight, output and propeller diameter can cause oscillations, during which the pilot is being lifted to one side by the torque effect, swings down due to his weight, and then is lifted again and so on.

To avoid this you can:

- Change the throttle setting.
- Adjust the cross bracing to counteract the torque (if there is one present).
- Shift yourself to the other side of the harness and/or change the trimmer setting.

The best method is to fasten opposite cross-bracing, or apply some weight-shift.

Such oscillations usually occur at full power - the greater the engine output and propeller diameter, the bigger the swings.

In addition pilot reactions can often be wrong or come too late, increasing the problem instead of solving it.

In this case the safest way to deal with this question is to close the throttle and release the brakes.

Less-experienced pilots especially tend to overreact.

This is called a pilot-induced oscillation, and the proven solution is to **leave the brakes alone**.

6.3 LEVEL FLIGHT

If you have a variometer or altimeter – check it regularly.

In level flight it is very easy to start climbing unintentionally.

The instrument will help you optimize speed and fuel economy.

Of course each flight depends on configuration of your gear, but due to NRG PRO II's ability to fly safely without constant piloting, it will let you adjust everything to the best effect.

Good knowledge of weather conditions (e.g. wind at different altitudes) and knowledgeable use of thermals, convergence or other kinds of lift will help you greatly reduce fuel consumption and increase flight range.

Of course the engine is always there to bring you to the right place.

Do not hesitate to thermal with the NRG PRO II in order to win some altitude and spare fuel - you will be surprised how efficient it is.

Closing the trimmers will make the climb ratio even better.



6.4 TRIMMERS AND SPEED-SYSTEM SETTINGS

You are free to experiment with all possible settings, **as long as you are at safe altitude and watch the weather**. Fully opened trimmers increase the speed of the wing and with it overall penetration and stability, **but when trimmers are opened it is highly recommended to use secondary steering only (stabilo steering), using the main brake handles will increase the risk of a collapse**.

As forces on the brakes grow at high speeds, the weight shifting or steering with STABILO STEERING system becomes increasingly effective.

STABILO STEERING system can be used in all trimmer and speed system settings, also in combination with main brake handles. At maximum speed bar and fully opened trimmers we **highly recommend** steering with STABILO STEERING system.

Strength needed to initiate the turn will be smaller and there will be no decrease in speed.

On the other hand, slow trimmer settings decreases sink and steering forces, so it is possible to efficiently use the thermals.

Worth noting is the NRG PRO II/NRG XC II's impressive speed range -the maximum speed is almost three times greater than stall speed.

Turns can be much improved by additional use of throttle, speed-system etc. Once you master these techniques, you will be able to execute fully coordinated and effective turns.

REMEMBER:

Trimmer setting is another part of the pre-start check list!
If it will be asymmetric, the wing will turn all the time.

6.5 LANDING

In PPG flying there are two kinds of landing: with and without power.

6.5.1 POWER OFF LANDING

At an altitude of 50 meters switch the engine off and glide as you would on a conventional paraglider.

It reduces the chances of damaging the propeller on landing, but on the other hand there is only one attempt possible -so it has to be done right!

NRG PRO II/NRG XC II preserves the energy well, so there is a long float necessary, exchanging the abundant speed for lift with your brakes.

6.5.2 POWERED LANDING

Make a flat approach with the engine idling, then level out and lose the speed before final flare.





Immediately on landing, switch off the engine.

The main advantage of this procedure is of course the possibility of going around with the wing again (repeating the approach) if anything goes wrong.

Still, if you forget to switch off the ignition before the wing falls down, there is a considerable risk of damaging propeller, catching lines in it or even suffering injuries connected with falling on your running engine.

Remember:

- Whenever possible, get to know the landing field before taking off.
- Check the wind direction before planning the approach.
- Landing with power off requires much less space.
- In case of any doubt, practice the landing until you feel totally safe
- Never place the power unit downwind of the paraglider.
- Check, double check and then check once again that there is no fuel leakage.
- Do you have enough fuel for the flight? It is always better to have too much than too little!
- Check that there is nothing loose in the harness that could possibly contact the propeller in flight.
- Whenever you encounter a problem, fix it **AT ONCE** however small it is!
- Always put on and lock helmet before getting in the harness.
- Before each launch run a full pre-flight inspection.
- After landing, continue to maintain the wing's direction straight, as on turning you always risk getting lines in the propeller.
- Turn only if there is danger.
- Do not fly over water, between trees or power lines and other places where engine failure will leave you helpless, always make sure you have possibility for emergency landing.
- Mind the turbulence caused by other gliders or even by yourself, especially when flying low.
- It is not recommended to let go of the brakes below 100 meters, because a possible power unit malfunction may require immediate attention.
- In general never trust your engine, as it can stop at any moment. Always fly prepared for engine failure.
- Unless it is absolutely necessary (e.g. collision avoidance), do not execute tight turns against the torque direction.
Especially when climbing you can easily enter a stall or negative spin.
- Do not fly with tail wind at low altitudes, - it narrows your options !
- Do not wait for the problem to grow - any change of engine sound or a vibration may indicate a problem. You'll never know until you land and check it out!
- Be certain of your navigation
- Remember that not everyone is fond of your engine noise.

7 PACKING

Spread the wing completely out on the ground. Separate the lines to the left and the right side of the glider. If the risers are removed from the harness, join the two risers together by passing one carabiner loop through the other. This keeps them neatly together and helps to stop line tangles.



Fold the canopy alternately from the right and left sides, working towards the centre, press out the air, working from the rear towards the front. Place the risers at the trailing edge of the folded canopy and use them to finally roll up the canopy.

8 MAINTENANCE & CLEANING

Cleaning should be carried out with water and if necessary, gentle soap. If the glider comes in contact with salt water, clean thoroughly with fresh water. **Do not use solvents of any kind**, as this may remove the protective coatings and destroy the fabric.

8.1 BUTT HOLES (Velcro closure on trailing edge tip)

In order to empty sand and small stones from the glider simply shake the sand or small stones into the wing tip and open the **Butt holes (Velcro closure on trailing edge tip)** to empty. Do not forget to close the **Butt holes** afterwards.



9 STORAGE

When the glider is not in use, the glider should be stored in a cool, dry place. A wet glider should first be dried (out of direct sunlight). Protect the glider against sunlight (UV radiation). When on the hill keep the glider covered or in the bag. Never store or transport the glider near paint, petrol or any other chemicals.

Do not leave your paraglider in the trunk of a car or exposed to the sun.

Temperatures on a hot summer's day in a closed environment: car, etc. can easily reach over 60°C

At these temperatures Nylon permanently changes its characteristics which may alter the behavior and shape of the wing.

It will cause permanent damage to the paraglider, rendering it non-airworthy. APCO's warranty will not be applicable.





10 DAMAGE

Using spinnaker repair tape (for non-siliconized cloth) can repair tears in the wing (up to 5cm). A professional repair facility should repair greater damage.

11 GENERAL ADVICE

A qualified person or agent of the company should check the glider every year. The glider is carefully manufactured and checked by the factory. Never make changes to the wing or the lines. Changes can introduce dangerous flying characteristics and will not improve flying performance.

Do not put the glider in direct sunlight when not necessary. In order to protect the glider during transportation or waiting time we recommend one of our lightweight storage bags.

If you have any doubts about flying conditions - do not begin.


If you have any questions, please contact your dealer or us.

Lastly, be equipped with a certified emergency parachute and helmet on every flight.






12 NRG PRO II/NRG XC II SKETCHES

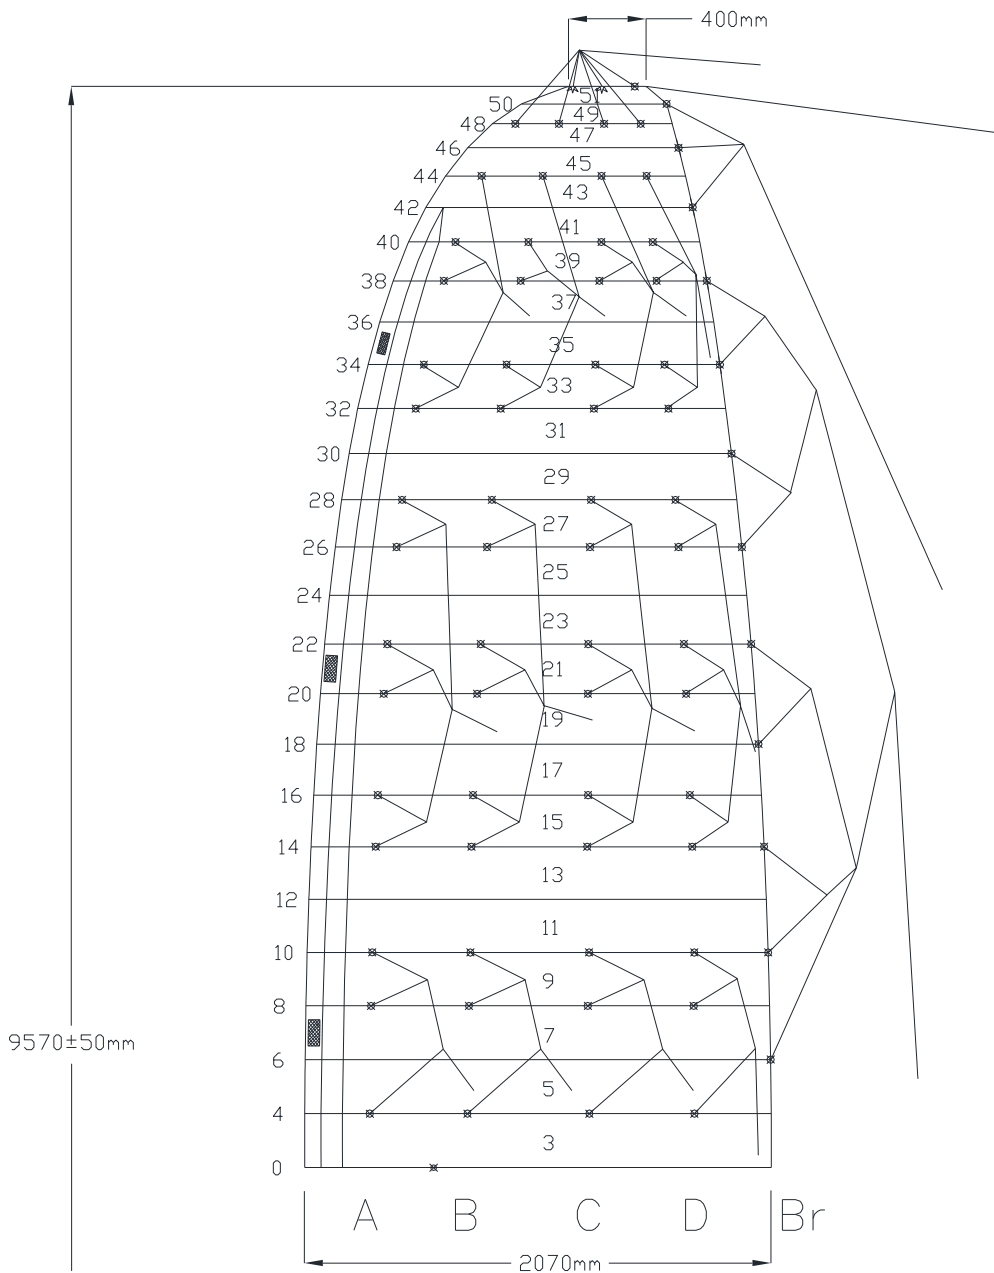

* All measurements are in mm				
Drawn by Adam Wechsler	Part N	Toll ±10		
Date 11.07.17	Name Lines sketch		Drawing N	
Scale				
Approved Jonathan Cohn				
APCO Aviation LTD.		Product	Revision	
		NRG Pro/XC II 16.5	0	




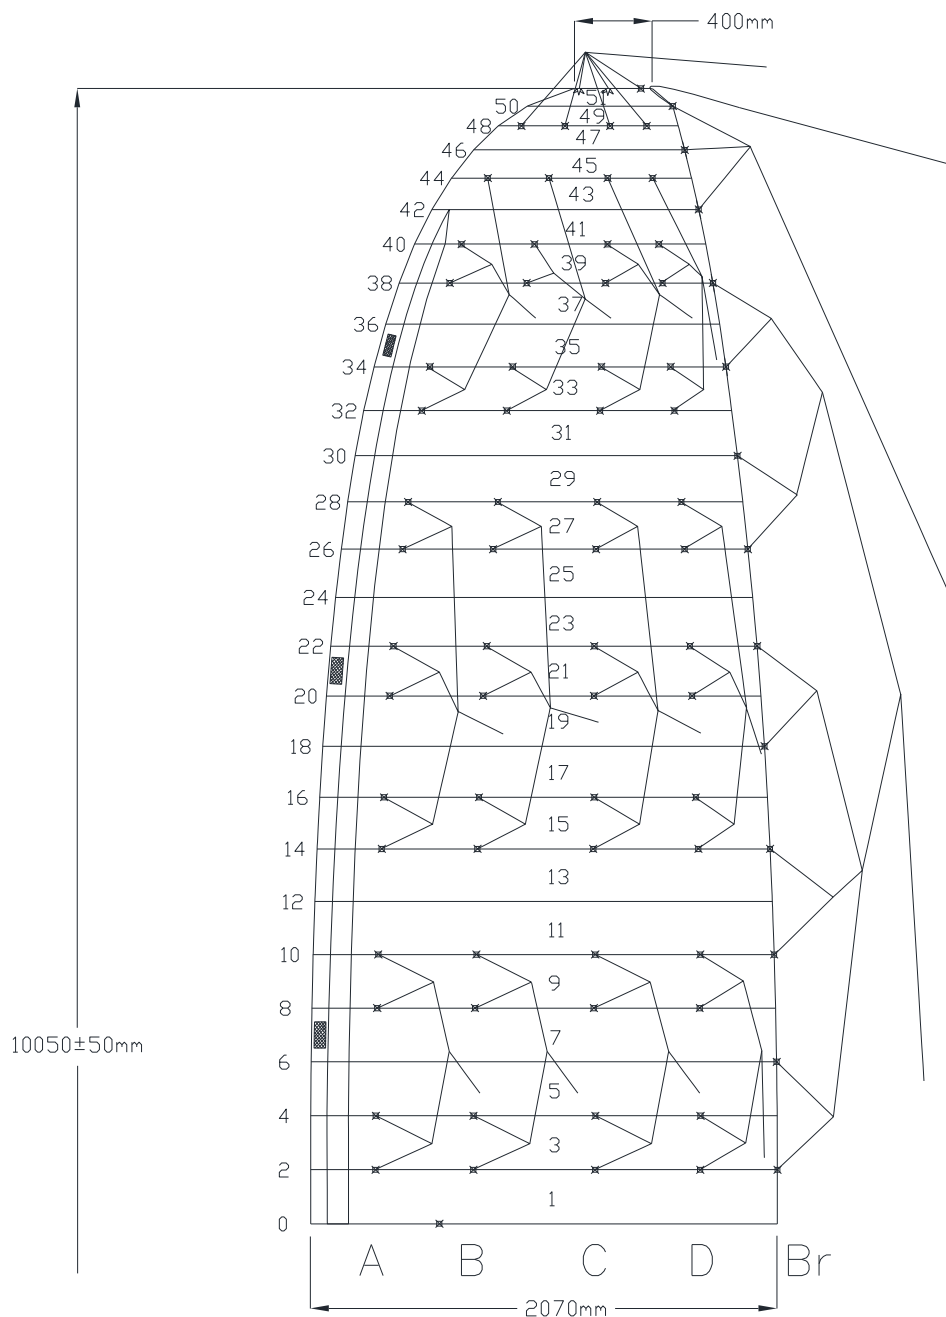

* All measurements are in mm

Drawn by Adam Wechsler		Part N	Toll ±10		
Date	31.07.17	Name Lines sketch			Drawing N
Scale					
Approved Jonathan Cohn					
APCO Aviation LTD. 			Product		Revision
			NRG Pro/XC II 17.5		1




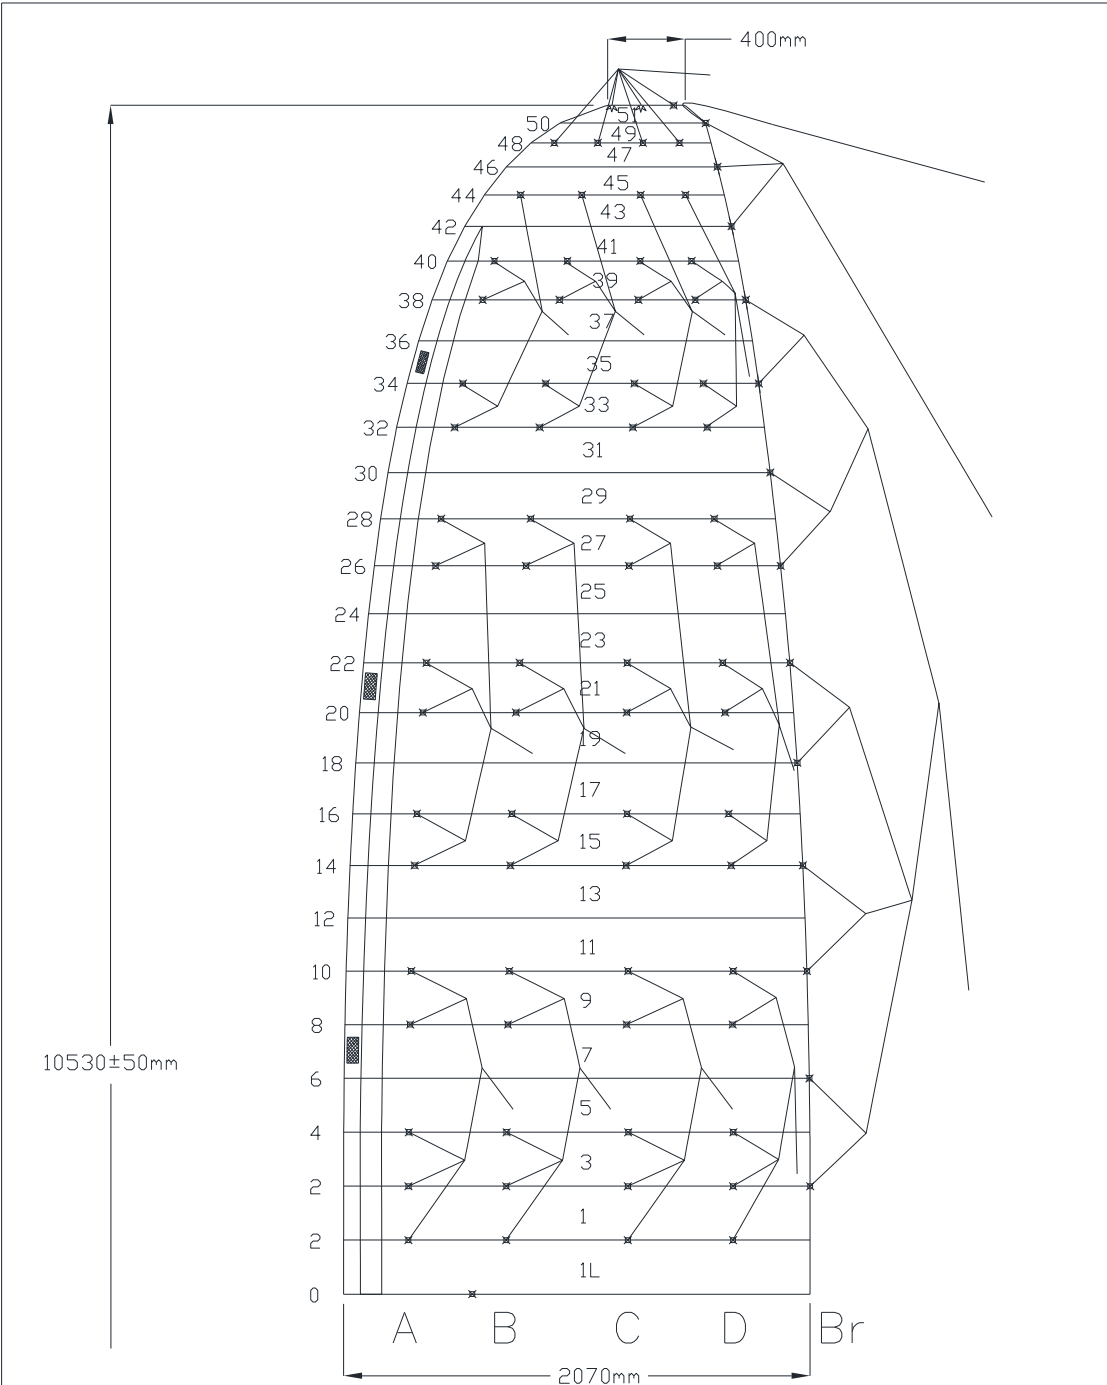


* All measurements are in mm

Drawn by	Adam Wechsler	Part N	Toll ±10	
Date	14.07.17	Name Lines sketch		Drawing N
Scale				
Approved	Jonathan Cohn			
APCO Aviation LTD. 			Product NRG Pro/XC II 18.5	Revision 0




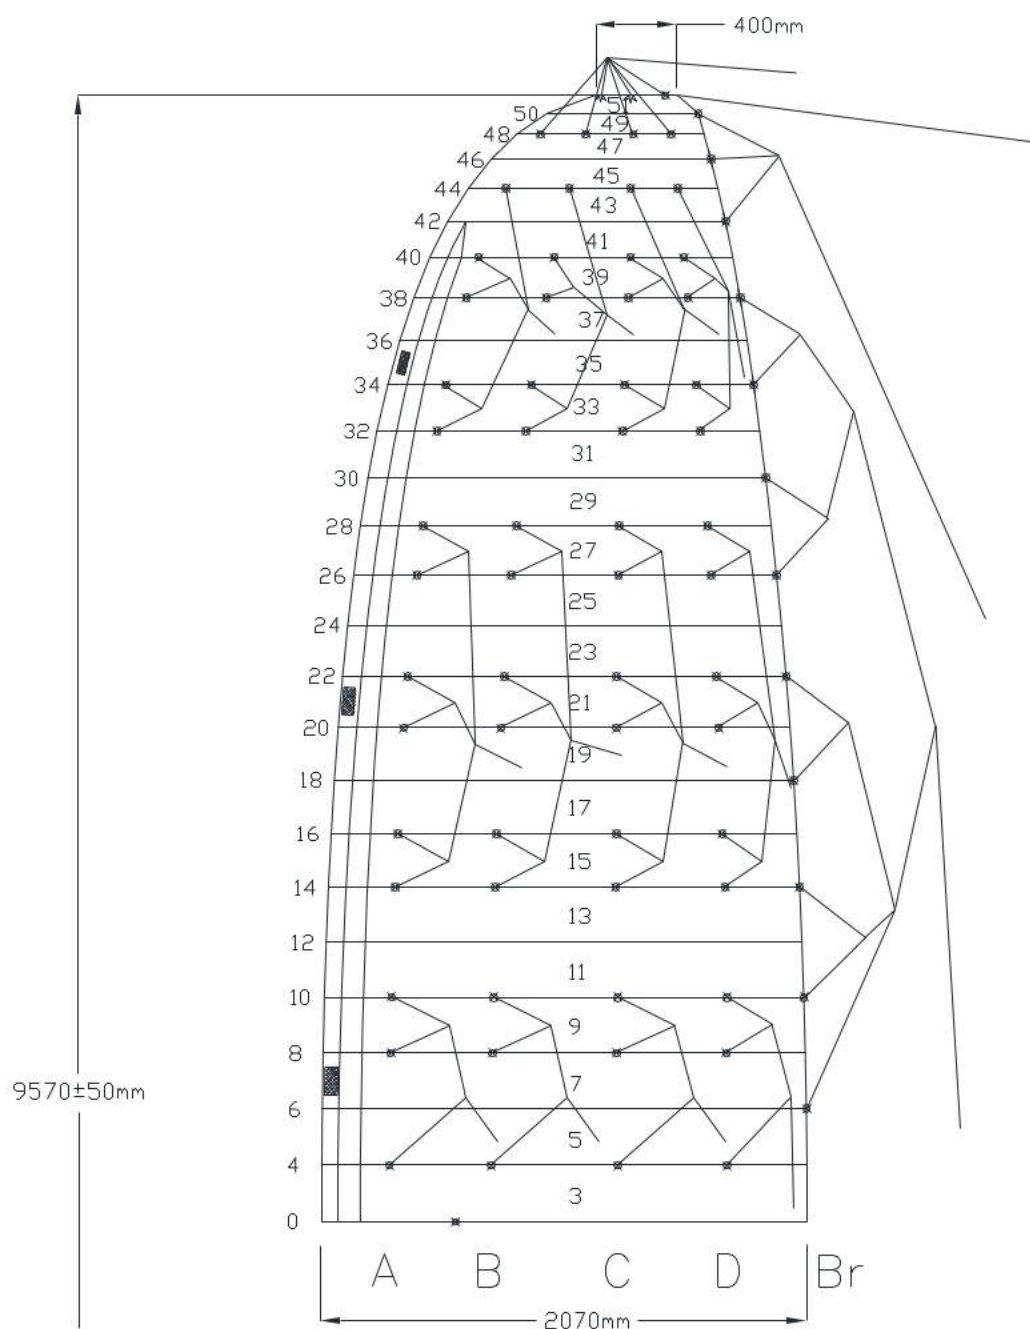


* All measurements are in mm

Drawn by Adam Wechsler	Part N	Toll ±10		
Date 11.07.17	Name Lines sketch		Drawing N	
Scale				
Approved Jonathan Cohn				
APCO Aviation LTD. 		Product NRG Pro/XC II 19.5		Revision 0




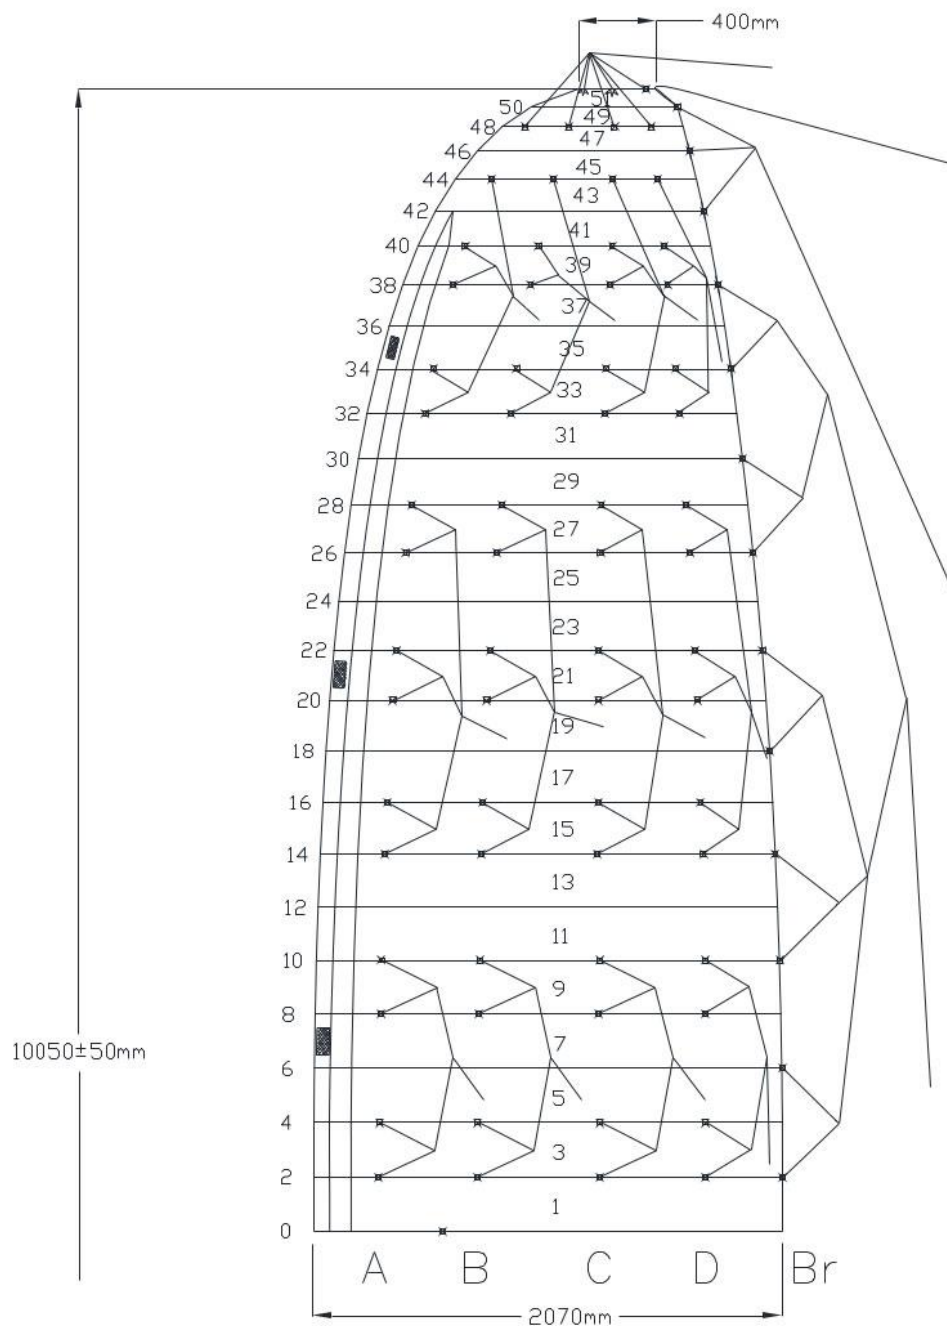

* All measurements are in mm

Drawn by Adam Wechsler	Part N	Toll ±10	
Date 31.07.17	Name Lines sketch		Drawing N
Scale			
Approved Jonathan Cohn			
APCO Aviation LTD. 		Product NRG Pro/XC II 20.5	Revision 1



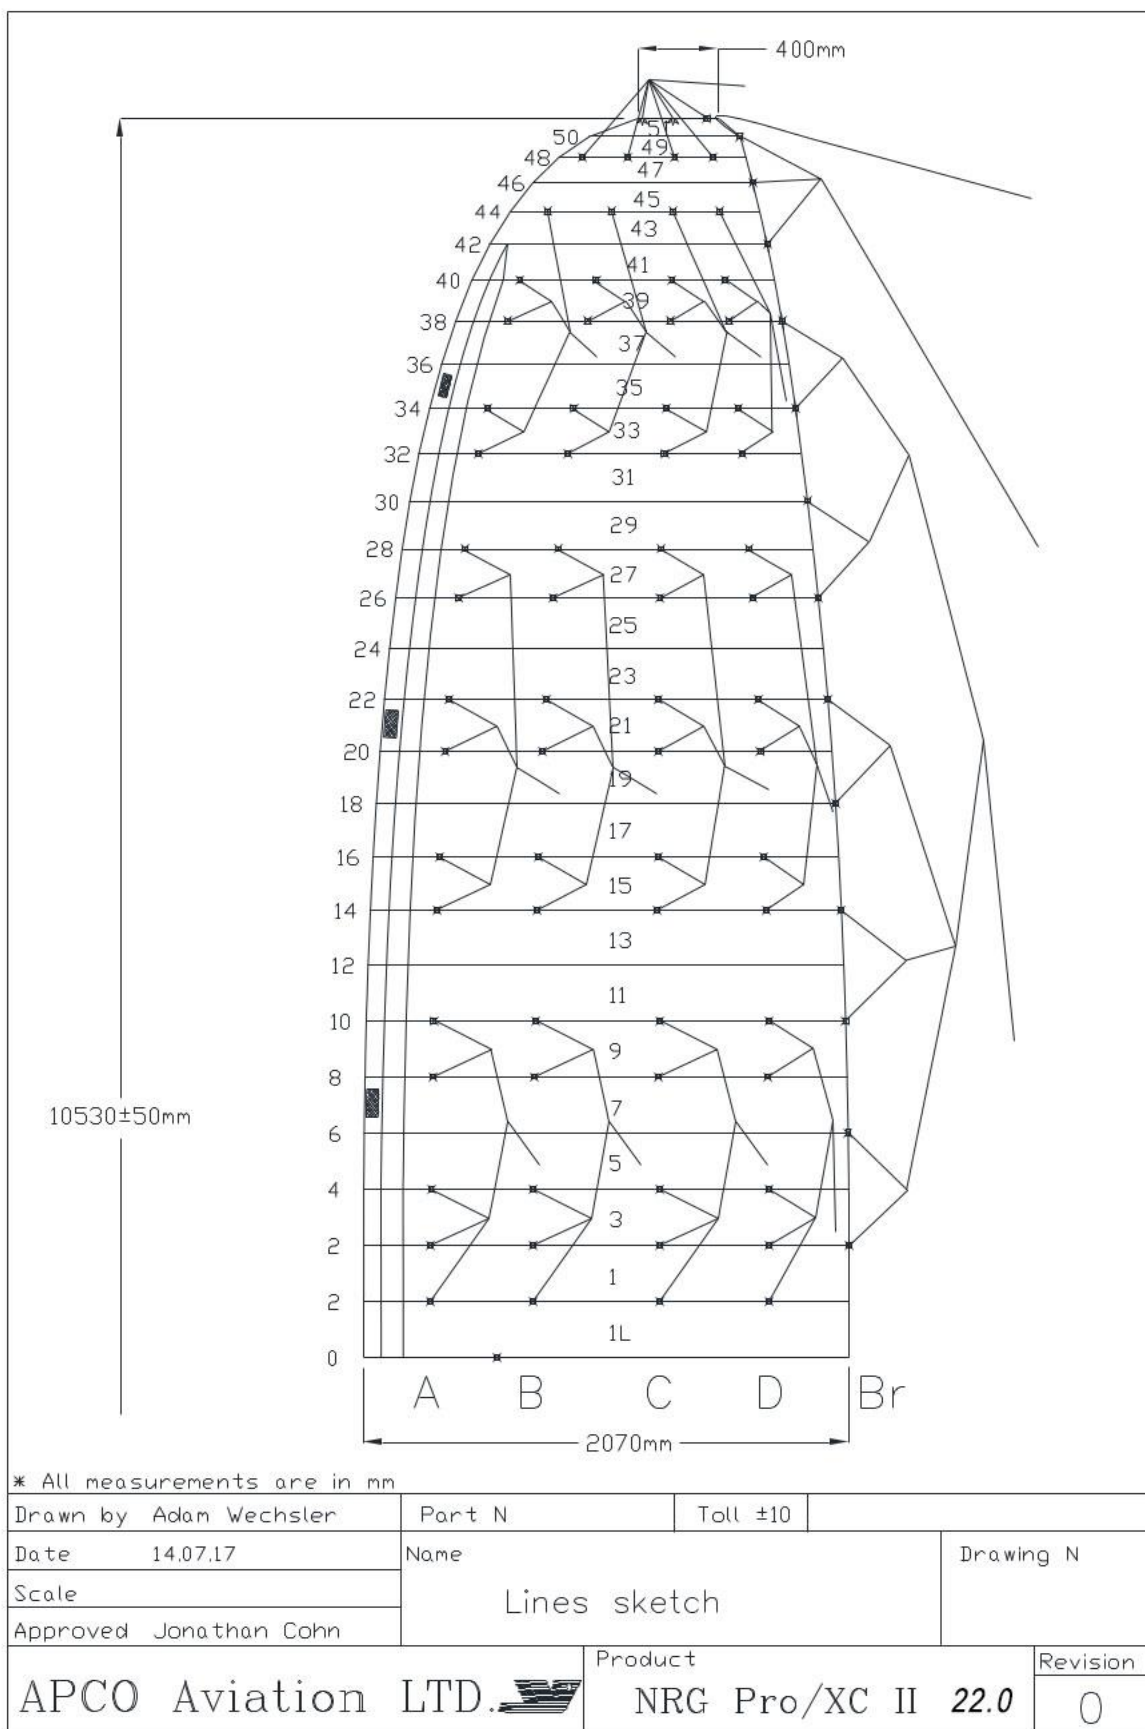



APCO wishes you many hours of enjoyable flying.

Take Air!

