


2023 14 08 (v 1.0)
EN 926-2:2013 & LTF 2-91-09



VISTA VI

Manual

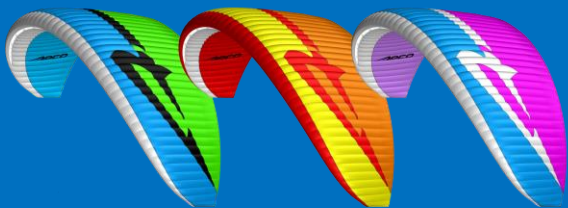

CONTENTS:

| | | |
|----|--|----|
| 1 | DISCLAIMER OF LIABILITY | 3 |
| 2 | INTRODUCTION | 4 |
| 3 | Paramotor Version | 6 |
| 4 | TECHNICAL DATA | 7 |
| 5 | CONSTRUCTION | 8 |
| 6 | MATERIALS | 10 |
| 7 | FLEXON® Batten system: | 10 |
| 8 | TRIMMING | 10 |
| 9 | HARNESS | 10 |
| 10 | SPEED SYSTEM | 11 |
| 11 | RISERS | 13 |
| 12 | TRIMMERS - Paramotor Version* | 14 |
| 13 | EMERGENCY PARACHUTE ATTACHMENT | 15 |
| 14 | GENERAL INSPECTION | 15 |
| 15 | ANNUAL / PERIODICAL AIRWORTHINESS INSPECTION | 15 |
| 16 | TAKE OFF | 19 |
| 17 | FLIGHT TECHNIQUES | 20 |
| 18 | LANDING | 24 |
| 19 | PACKING | 26 |
| 20 | MAINTENANCE & CLEANING | 26 |
| 21 | BUTT HOLE II | 26 |
| 22 | STORAGE | 27 |
| 23 | DAMAGE | 27 |
| 24 | GENERAL ADVICE | 27 |
| 25 | RECYCLING | 28 |
| 26 | LINE TABLES & DIAGRAMS | 29 |



* Paramotor version only

1 DISCLAIMER OF LIABILITY

Taking into consideration the inherent risk in paragliding or hang gliding, (free flying and motorized), it must be expressly understood that the manufacturer and seller do not assume any responsibility for accidents, losses and direct or indirect damage following the use or misuse of this product.

APCO Aviation Ltd. is engaged in the manufacture and sale of hang gliding, paragliding, motorized Para/hang gliding and emergency parachute equipment.

This equipment should be used under proper conditions and after proper instruction from a qualified instructor. APCO Aviation Ltd. has no control over the use of this equipment and a person using this equipment assumes all risks of damage or injury.

APCO Aviation Ltd. disclaims any liability or responsibility for injuries or damages resulting from the use of this equipment.

The glider is designed to perform in the frame of the required class as certified.

WARNING

This is not a training manual. It is extremely dangerous to yourself and others to attempt to use this product without first completing a course given by a qualified instructor.

Apco Aviation's products are carefully manufactured and inspected by the factory. Please use the product only as described in this manual.

Do not make any changes to the product.

AS WITH ANY SPORT - WITHOUT TAKING THE APPROPRIATE PRECAUTIONS, PARAGLIDING CAN BE DANGEROUS.

2 INTRODUCTION

The Vista has become a legend in its own time... Now in its 6th generation, it is lighter, cleaner and with all the latest materials & construction technologies incorporated.

The Vista VI is APCO's middle B, designed for talented beginners or pilots who wish to step up to the B category with a very calm, safe and easy wing to fly.

Vista VI is a very solid canopy which reassures the pilot with its consistency and pitch damping characteristics.

The wing especially excels in strong conditions with its solidity and homogenous feeling. It will reassure the pilot with its safety, build confidence, allowing for continuous improvement in cross country skills.

VISTA VI - exciting sport class EN B wing with fully sheathed lines and lighter materials. The new VISTA VI is based on the platform of Vista IV and improved on several key points:

- Impressive performance for the category, Designed for performance, and fine-tuned for easy flying!
- Lightweight, yet durable - Vista VI starts at 4.6 kg. without sacrificing any durability whatsoever!
- True 3 liner throughout the span of the glider down to the risers
- Optimized line materials - sheathed bottom lines, connected to unshathed middle and top floor lines for weight saving and aerodynamics.
- Mini ribs (MRB) - for laminar trailing edge flow.
- 3D Cut on both top and bottom surface. For clean, wrinkle-free surfaces.
- Brake Tensioners on trailing edge - progressive and responsive brake action.

VISTA VI will be the perfect companion for any pilot from a talented school student to cross country pilot looking for a good performing, safe and easy to manage wing.



CHARACTERISTICS

- **CONSTRUCTION**

According to Apco's legendary tradition for durability - the top surface is APCO's double siliconized cloth. Bottom surface and internal parts from lightweight materials to save weight without compromising on durability.

- **TAKE OFF**

The APP profile (shark nose) profile with lighter materials, helps this wing to have an easy balanced inflation, The wing will rise easily and controllably overhead without a tendency to overshoot or lift the pilot if checked overhead.

- **THERMALING**

The VISTA VI will easily settle in a constant angle of bank turn in a thermal, requiring very little input once centred, resulting in a superior climb rate, which will have you at the top of the gaggle in no time.

- **PERFORMANCE**

Best Glide will be achieved at 1/3 speed bar, and the APP / shark nose profile keeps the wing highly pressurised and collapse resistant throughout the speed range.

- **LANDING**

Simple, predictable approach and flair to a standstill.

- **PILOT FEEDBACK**

simple to understand is how to summarise the VISTA VI. The wing is both reassuring and precise in its pilot feedback. It is a forgiving wing for beginners, and when directed correctly, it will immediately respond without hesitation.

- **VISTA VI**

The VISTA VI is fun to fly and will even excite pilots for long cross-country flights. Great and secure glider at the same time to enjoy for hours on end

3 Paramotor Version


The VISTA VI is also available with motor risers.

The lightweight canopy makes a huge difference for nil wind forward launches. Its pitch stability turns it into a very pleasant paramotor wing as it cuts through the air almost unaffected by small turbulence. Coupled with its performance, it is a highly efficient paramotor wing perfect for electric engines or low power motors.



4 TECHNICAL DATA

| SIZE | XS | S | M | L |
|------------------------------|---|--------|--------|---------|
| Cells | 49 | 50 | 52 | 52 |
| Area m2 | 24.8 | 25.7 | 27.5 | 29.3 |
| Area (projected) m2 | 21.1 | 21.88 | 23.21 | 24.93 |
| Span (incl. Stabiliser) m | 11.43 | 11.76 | 12.41 | 11.81 |
| Span (projected) m | 8.83 | 9.16 | 9.73 | 10.30 |
| Aspect Ratio | 5.3 | 5.4 | 5.6 | 5.8 |
| Aspect Ratio (projected) | 3.96 | 3.83 | 4.08 | 4.25 |
| Weight Range (incl. Wing) kg | 55-80 | 70-95 | 90-110 | 105-130 |
| Weight Range (Paramotor) kg | 70-110 | 85-125 | 95-140 | 120-160 |
| Weight kg | 4.6 | 4.8 | 5.1 | 5.4 |
| Root Cord m | 2.72 | 2.72 | 2.72 | 2.72 |
| Tip Cord m | 0.52 | 0.52 | 0.52 | 0.52 |
| Length of Lines on B m | 6.61 | 6.89 | 7.45 | 8.01 |
| Total length of lines m | 244 | 252 | 268 | 284 |
| Number of Risers | 3+2 (A, A5, B, C & C5) | | | |
| Speed Bar Travel | 13cm | | | |
| Trimmers | No (Paramotor riser available on request) | | | |

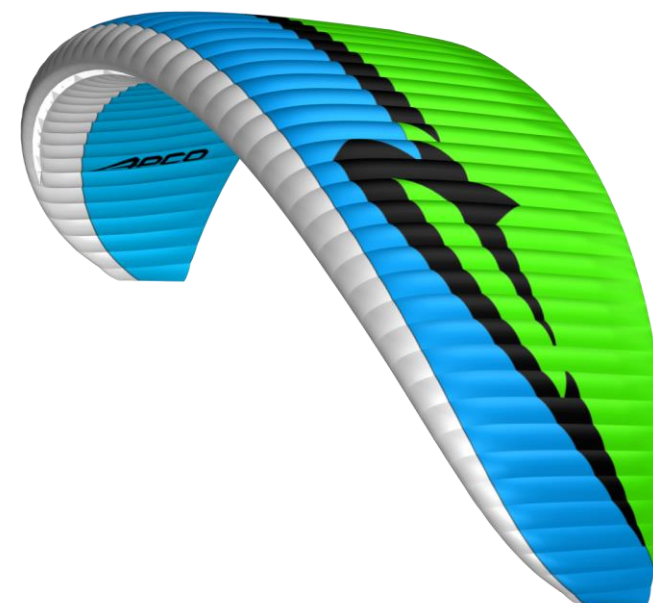

| LINES | | | | |
|-------------------------|--------------|------------------|----------|----------|
| Line | Material | Specification | Diameter | Strength |
| Top ; Brake Top; St Top | Dyneema | Cousin CTL910130 | 1.1mm | 95kg |
| Mid; St | Super Aramid | Cousin CTL900120 | 1.2mm | 120kg |
| Bottom A1;B1; C | Super Aramid | Cousin CTL900320 | 1.9mm | 320kg |
| Bottom A3; A5;B3; B5 | Super Aramid | Cousin CTL900230 | 1.8mm | 230kg |
| Steering Line | Dyneema | Cousin CTL910190 | 2.0mm | 190kg |

| FABRIC | |
|------------|-------------------------------|
| Sail Cloth | "Zero Porosity" Ripstop Nylon |
| Warranty | 3 Years / 250 hours |

| GLIDER PERFORMANCE DATA | |
|------------------------------------|----------|
| V-min. | 21 km/h |
| V-trim | 39 km/h |
| V-max. | 51+ km/h |
| Min Sink (at optimum wing loading) | 0.95 m/s |
| Speed System Travel | 140mm |



| CERTIFICATION DATA - Flight Test Configuration | | | | | | | | |
|---|-------------------------|----|--------------------------------|----|-------------------------------|-----|----------------------------------|-------------------------------|
| SIZE | Harness to riser | | Distance between risers | | Test Weight Low / High | | Brake Range at Max Weight | Certification EN / LTF |
| XS | - | - | - | - | - | - | - | - |
| S | 43 | 40 | 40 | 44 | 70 | 95 | >60cm | B |
| M | 43 | 43 | 44 | 46 | 85 | 110 | >65cm | B |
| L | 44 | 43 | 44 | 46 | 105 | 130 | >65cm | B |

5 CONSTRUCTION


The glider is constructed with a top and bottom surface, connected by ribs. One top and bottom panel, together with the connecting ribs is called a cell. Each cell has an opening on the front lower part. The cells fill with air forcing the panels to take the shape dictated by the air-foil (rib) section.

On either side the wing ends in a stabilizer or wing tip, which provides straight-line (Yaw) stability and produces some outward lift to keep the span-wise tension.

The front part of the ribs use APCO's FLEXON batten system to keep the leading edge shaped at high speeds and in turbulent air. They also improve the performance and the launch characteristics of the glider.

The line hook-up points are made of Dyneema and imbedded in the bottom surface of the wing for minimal drag and maximum performance.

PARAGLIDER PARTS

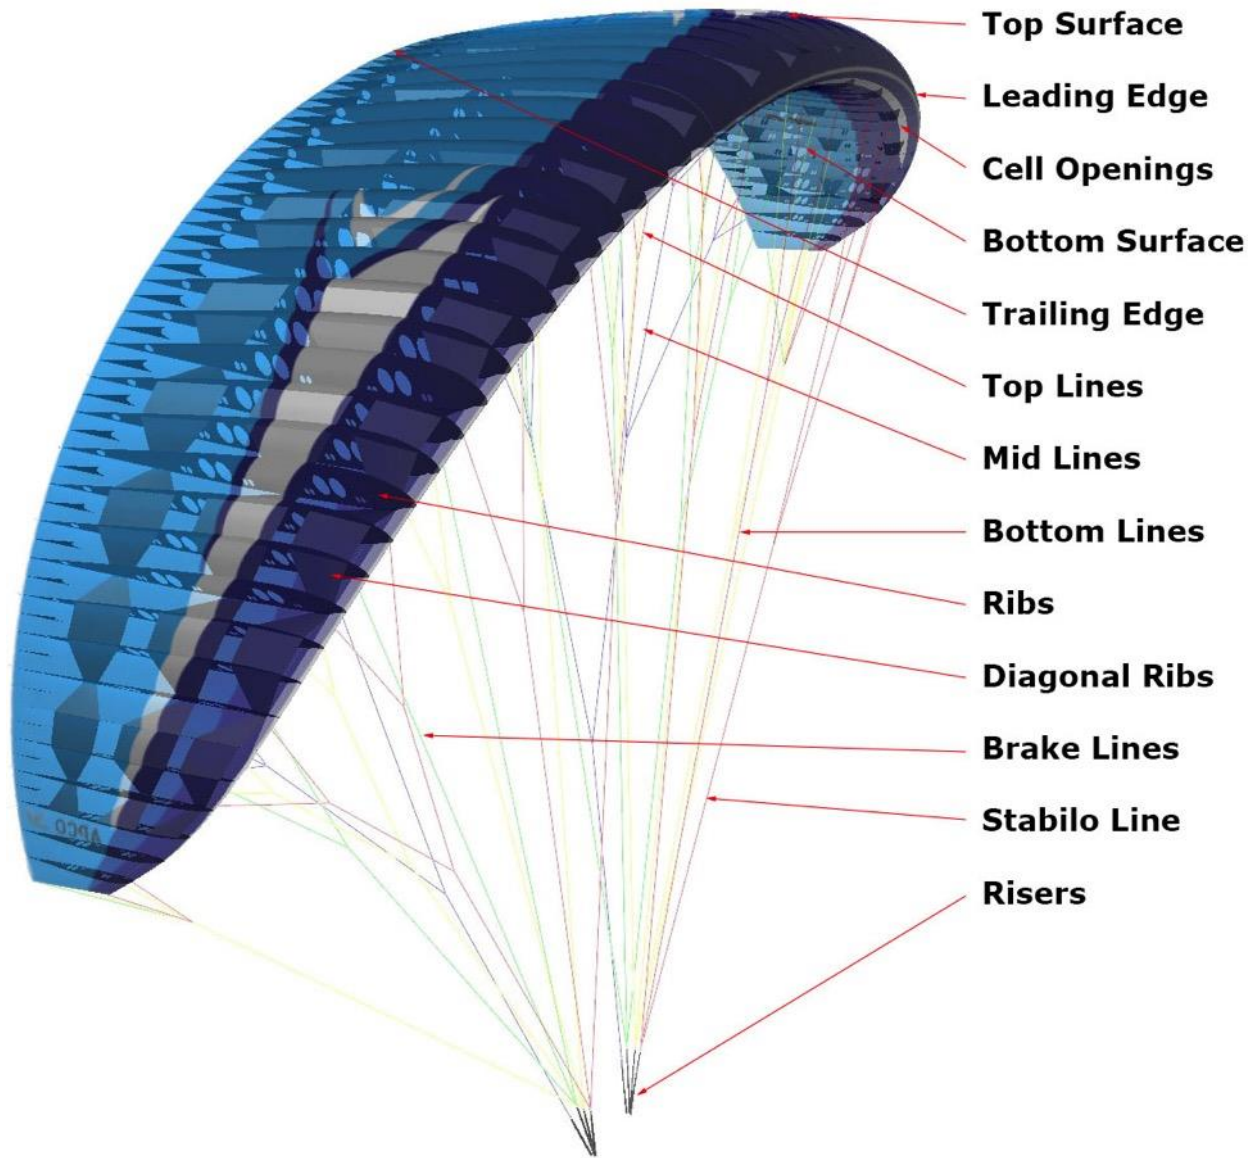


6 MATERIALS

The glider is made from tear resistant Ripstop Nylon cloth, which is P.U. coated to zero porosity and then siliconized to give the fabric high resistance to the elements. Different cloth is used for the top, bottom and ribs due to their different functions. The lines are made of superaramide covered with a polyester sheath for protection against UV, wear and abrasion. The bottom section of the brake lines is made of polyester because of its better mechanical properties. The maillon quick links that attach the lines to the risers are made of stainless steel.

7 FLEXON® Batten system:

New generation FLEXON® batten system incorporated (see below) in the leading edge of the ribs, insuring perfect profile shape (instead of traditional Mylar reinforcement). FLEXON® battens reduce the weight of the glider by an additional 500gr. and unlike Mylar reinforcement will guarantee no deterioration in performance or launch.

Additional advantage of FLEXON batten is that it is practically indestructible, safeguarding the performance and launch over the lifespan of the glider.

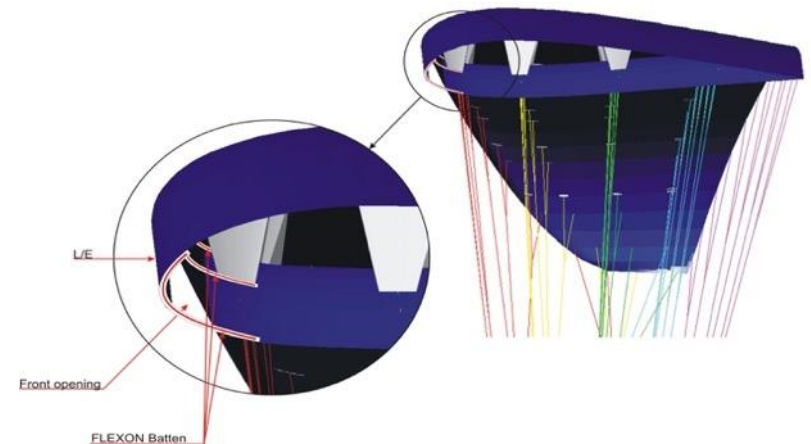

8 TRIMMING

All APCO gliders are trimmed for optimum performance combined with unsurpassed safety. It is very important not to re-trim or tamper with any of the lines or risers as this may alter the performance and safety. Trimming of the brake line should be done in accordance with this manual and carefully checked before flying.

9 HARNESS

All of Apco's gliders are developed with the use of ABS (Automatic Bracing System) type harnesses without cross bracing. We recommend the use of an ABS harness with all our gliders. Most certified harnesses may be used with our gliders. For best safety and performance we recommend an Apco harness equipped with a Mayday emergency parachute.

CAUTION:

WE RECOMMEND NOT TO USE CROSS BRACING STRAPS.

APCO GLIDERS ARE DEVELOPED AND TESTED WITHOUT THE USE OF CROSS BRACING. USING AN ABS HARNESS WITH CHEST STRAP SET AT THE SPECIFIED WIDTH (CHECK THE CERTIFICATION STICKER ON YOUR GLIDER) WILL RESULT IN THE HIGHEST PASSIVE SAFETY ON YOUR GLIDER.

10SPEED SYSTEM


ASSEMBLY & ADJUSTMENT

Apco gliders can be ordered with the Wonder-Bar, which makes reaching the speed bar a breeze.

First attach the harness to the glider. Remove the Brummel hooks from the end of the accelerator line attached to the speed bar, then thread it through the elasticized ring on the harness, then through harness pulley and then re-attach it to the Chain link with a larks-head knot. Hook the Chain link onto the Chain Link on the riser of the corresponding side. Sit in the harness and have someone hold the riser up in a flying position for you. Adjust the speed bar line by pulling the end through the speed bar tube and moving the knot. The Bar should be about 10 cm (or closer if you have a second step) away from the front of the harness seat. This allows you to easily reach the bar with your foot, and will allow you to use the full range of the speed bar if you extend your legs fully. Do not adjust the speed system too short, as this will cause it to be activated permanently while flying, and could be dangerous. It is possible to fit a second step to the system, if one has trouble using the full range of the system (supplied separately).

COMPATIBILITY

Apco gliders are supplied with a speed system compatible with most harnesses on the market today. Follow your Harness Manual for connecting your speed system. Do a hang test to ensure that the adjustment is correct. Flying with a speed system adjusted too short will cause it to be applied all the time, which can be dangerous.

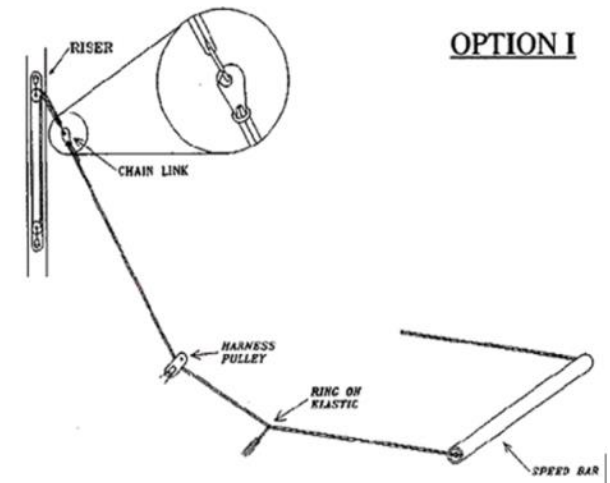

SPEED BAR & TRIMS?

On the VISTA VI (Paramotor Version), the Speed Bar should **NOT** be used with Trims open in turbulent conditions, or by inexperienced pilots. Recovery from a collapse may be more demanding with the trims in the open position.


WARNING:

The use of the speed system in turbulent conditions or close to the ground is dangerous. While flying with the accelerator, the glider has a reduced angle of attack and is therefore more susceptible to turbulence and may collapse or partially deflate. Gliders react faster when accelerated and may turn more. The accelerator should immediately be released in this case.

11 RISERS

The VISTA VI risers is featuring a split A riser. The 1st A-riser attaches to the central two A lines (A1 & A3). The second A-riser is attached to the outermost A line (A5). This is to facilitate Big ears or Tip tucks. At no time should the pilot change the risers or use risers not intended for this specific glider, as this will affect the performance, safety and void the certification of the glider. The fully activated travel is 140mm. The Paramotor version of the VISTA VI is equipped with trimmers - See details in the Paramotor section on page 17 of this Manual.

Vista VI is offered with 2 different types of risers:

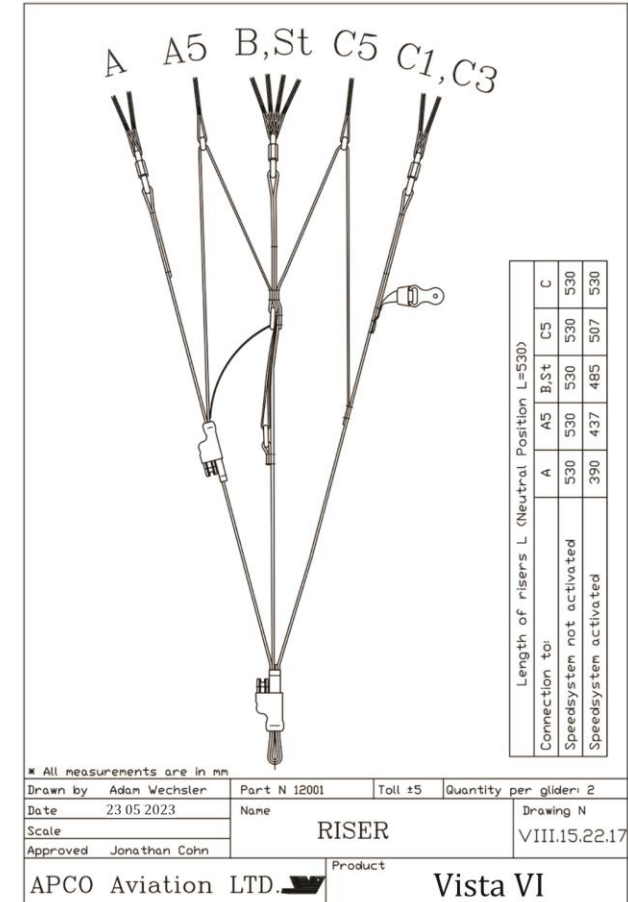


Lightweight (99 grams) made from 12mm Kevlar polyester webbing with APCO's proprietary V-links. Simple to understand, clean design, recommended for pilots who do not need C-steering option.

Equipped with C-steering system for building piloting skills and active flying on speed bar – recommended for pilots stepping up from an A wing.

| | | | |
|------------------------------|---------------|----------------------|---------------|
| * All measurements are in mm | | | |
| Drawn by | Adam Wechster | Part N | 12001 |
| Date | 23.05.2023 | Toll | ±5 |
| Scale | | Name | RISER |
| Approved | Jonathan Cohn | Quantity per glider: | 2 |
| APCO Aviation LTD. | | Drawing N | VIII.15.22.17 |
| Product | | Vista VI | |

12TRIMMERS - Paramotor Version*

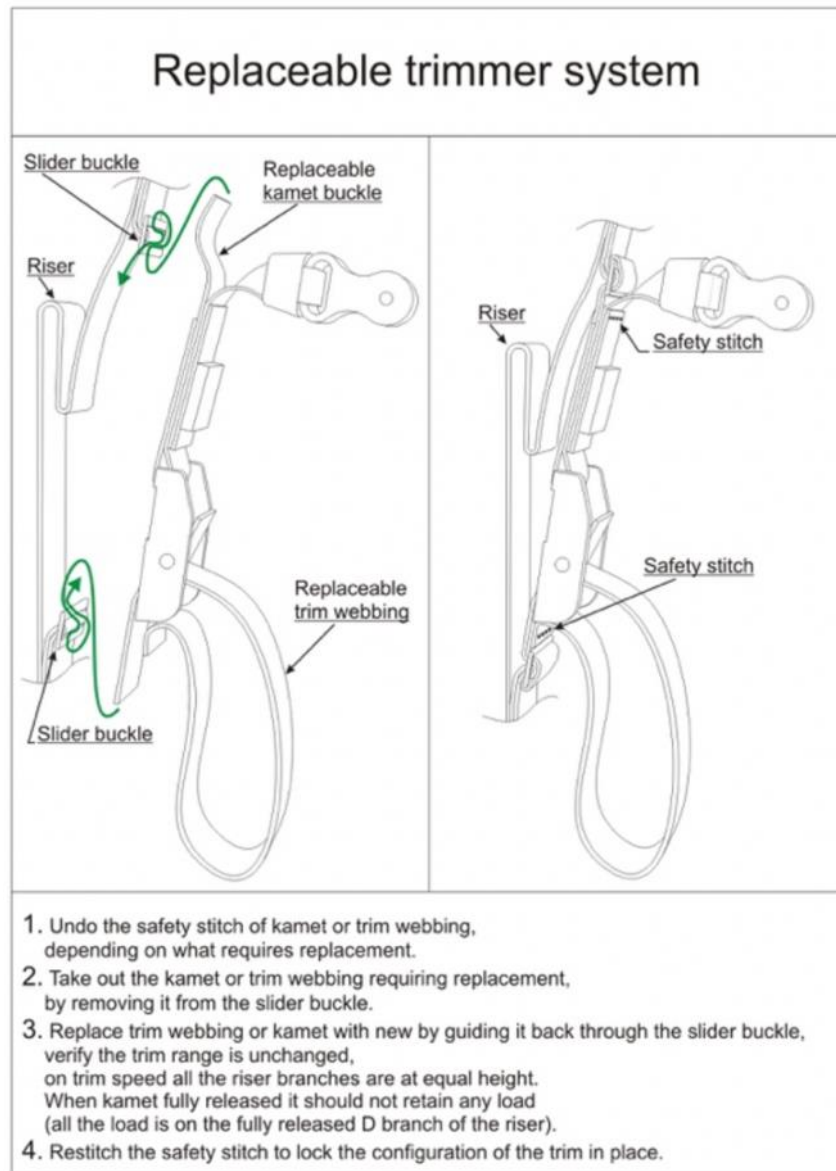

The neutral setting is when the A/B/C risers legs are of equal length in flight (blue mark on the trim webbing).


For Take-off and landing, the trimmers should be in the closed (minimum trim speed) position. They can be set asymmetrically to compensate for torque effect.

REPLACEABLE TRIM SYSTEM

The Trim Tabs should be replaced if they begin to show signs of wear, or start slipping. Replacement should be done by a qualified person - consult your dealer.

*Paramotor Version

The VISTA VI conforms to EN certification with the trimmers in the closed position.

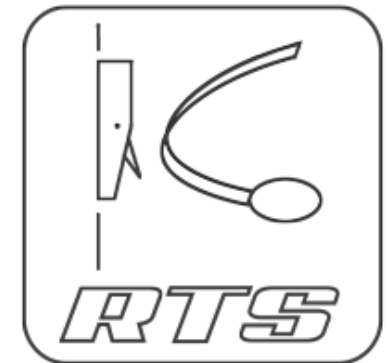

13 EMERGENCY PARACHUTE ATTACHMENT

It is recommended to use a certified rescue parachute when flying. Attaching the rescue parachute should be done in accordance with the recommendation of the harness and reserve parachute manufacturer.

14 GENERAL INSPECTION

Pilots, please ensure that your glider has been test flown and fully checked by your dealer before taking it into your possession. Verify that the dealer checked and confirms that the glider is airworthy.

In case of use of the wing in combination with trike:

Due to the very wide assortment of trikes on the market with different set up and design, it is necessary to verify that the specific trike can be successfully coupled with the wing.

Please make sure your dealer performs the following procedures before first flight:

A. It was checked with APCO that the specific trike can be flown with your new wing.

In case the specific combination is not checked by APCO - your dealer must take the following necessary steps:

B. Wing to be fully inspected by the dealer as in the paragraph above

C. Wing to be ground handled and visually checked while inflated.

15 ANNUAL / PERIODICAL AIRWORTHINESS INSPECTION


It is highly recommended that your glider (and other equipment), undergo a Periodical Airworthiness Inspection which is to be done by Apco, or an Apco approved / appointed service centre.

This is recommended to be done every 24 months or every 100 hours, whichever comes first.

This recommendation is in line with Israeli regulations, binding in Israel. as an alternative, we suggest for you to follow the regulations set by your national authorities.

POROSITY:

Porosity is measured with a calibrated Porosimeter. It should be measured in at least 5 different places on the **upper surface**. Below is an example of the sections we test at Apco. The upper surface, at 20-35% chord (from L/E) is most prone to becoming porous, and is thus the most important section to test. It is also important to test the different cloth types, and different colours used.

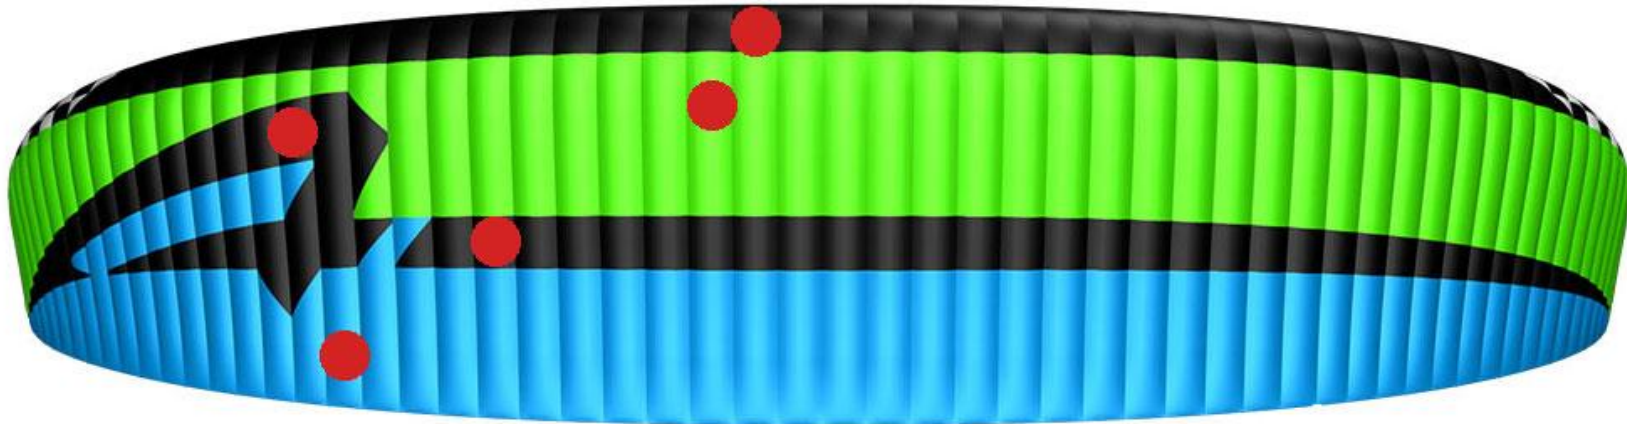

LINE INSPECTION / MAINTENANCE

Superaramide lines are known to be sensitive to the influence of the elements. They must be carefully inspected periodically. In his/her own interest, the pilot must observe the following points to ensure maximum performance and safety from the glider. Avoid sharp bending and squeezing of lines. Take care that people do not step on the lines. Do not pull on the lines if they are caught on rocks or vegetation. Avoid getting the lines wet. If they do get wet, dry them as soon as possible at room temperature and never store them wet.

One line of each line group (a, b, c, upper and lower) must be tested for minimum 50% of the rated strength. if the line fails under the load test or does not return to its specified length all the corresponding lines must be replaced. never replace lines with different diameter or type of lines as all gliders were flight and load tested for safety in their original configuration. Changing line diameter/strengths can have dangerous / fatal consequences.

Professional use of gliders: towing, tandem, schooling and competition flying requires more frequent line inspection and replacement of A, B, C, D and brake lines. [For replacement lines please refer to our online direct line services.](#)

BRAKE ADJUSTMENT

Before the first flight, the pilot/dealer has to take his/her glider and inflate it to check brake length and if needed shorten or lengthen the brake setting to his or her preference. It is important that the brakes are not set too short. If the glider is above your head the brakes should not be pulling the trailing edge down, as that means that the brakes are too short. A good setting is to have about 10 cm of slack in the brake from the brake guide (pulley) on the riser to the activation point of the brakes. (See Diagram below)

FIRST CHECK AND PREFLIGHT INSPECTION

With every new glider, the following points should be checked:

- Connection points between the glider and the harness.
- Check that there are no lines twisted, tangled or knotted.
- Check that the risers and speed-system are hooked up to the harness correctly.

REGULAR INSPECTION CHECKS

- Damage to lines, webbing and thread on the stitching of the harness and risers.
- The stainless-steel connection links on the risers are not damaged and are fully closed.
- The pulleys of the speed system are free to move and the lines are not twisted.
- The condition of the brake lines, stainless steel rings and the security of the knot
attaching the brake handle to the brake line.
- The sewing, condition of the lines and connection of the lines.
- Damage to hook up points on the glider.
- Internal damage to the ribs and diagonal ribs.
- Damage to the top and bottom panels and seams between panels.



FINAL WORDS ON YOUR LINES:

IT IS **STRONGLY RECOMMENDED** TO CHECK THE LINES ON EVERY PARAGLIDER EVERY 24 MONTHS OR EVERY 100 HOURS, WHICH EVER COMES FIRST.

ONE OF EACH A, B, AND C LINE MUST BE TESTED FOR MINIMUM 50% OF THE RATED STRENGTH. IF THE LINE FAILS UNDER THE LOAD TEST OR DOES NOT RETURN TO ITS SPECIFIED LENGTH ALL THE CORRESPONDING LINES MUST BE REPLACED. THIS RECOMMENDATION IS IN LINE WITH ISRAELI REGULATIONS, BINDING IN ISRAEL.

AS AN ALTERNATIVE, WE SUGGEST FOR YOU TO FOLLOW THE REGULATIONS SET BY YOUR NATIONAL AUTHORITIES WITH REGARD TO LINE MAINTENANCE AND REPLACEMENT.

NEVER REPLACE THE LINES WITH DIFFERENT DIAMETER OR TYPE OF LINES AS ALL GLIDERS WERE LOAD TESTED FOR SAFETY IN THEIR ORIGINAL CONFIGURATION. CHANGING LINE DIAMETER/STRENGTHS CAN HAVE FATAL CONSEQUENCES.

Professional use of gliders: towing, tandem, schooling and competition flying requires more frequent line inspection and replacement of all lines.

[For replacement lines please refer to our online direct line services.](#)

FLYING

16 TAKE OFF

As this is not a training manual, we will not try to teach you launching techniques. We will only briefly go through the different launch techniques to help you get the most out of your glider.

LAYOUT

Pre-flight check should be done before every flight.

Spread the glider on the ground. Spread the lines, dividing them into eight groups A, B, C and brake lines left and right. Make sure the lines are free and not twisted or knotted.

Make sure all the lines are on top of the glider and none are caught on vegetation or rocks under the glider. Lay out the glider in a horseshoe shape. This method insures that all the lines are equally tensioned on launch, and results in an even inflation.

- The Flexon rib reinforcements will keep the leading edge open for easy inflation.
- The most common reason for a bad launch is a bad layout!

ALPINE LAUNCH OR FORWARD LAUNCH

The VISTA VI has very good launch behaviour in no wind conditions.

For the best results we recommend the use of the following techniques: Lay out the glider and position yourself in the centre of the wing with the lines almost tight.

With a positive and constant force inflate the wing holding only the A-risers, and smoothly increase your running speed. The wing will quickly inflate and settle above your head without the tendency to stick behind, you may have to pull some brake to stop the wing from overshooting on an aggressive run.

After you leave the A-risers, apply about 15% brakes and the VISTA VI will gently lift you off the ground.

STRONG WIND AND REVERSE LAUNCH

The VISTA VI has a lot of lifting power and care should be taken in strong wind. It is advisable to have an assistant hold you when attempting a strong wind launch. It also helps if you walk towards the canopy and leave the A-riser just before the glider gets above your head. Then pull a bit of brake to stop the wing from overshooting, but not too much as the glider might pull you off your feet too early.

The assistant should let you walk in under the wing on inflation rather than resist the inflation; this reduces the tendency of the glider to lift the pilot prematurely.

TOW OR WINCH LAUNCHING

All APCO gliders are well suited for winching and have no bad tendencies on the winch. With towing it is important to have the wing above your head on launch and not to try and force a stalled wing into the air. This is especially important if the winch operator is using high tension on the winch. Very little brake if any need be applied on launch and during the tow. Directional changes can be made with weight shift rather than brakes. While on tow, the brake pressure will be higher and more force may be needed to make corrections than in normal flight.

17 FLIGHT TECHNIQUES

The VISTA VI is pleasant glider to fly, it has excellent performance and was designed for recreational and cross country flying.

FLYING SPEED

Indicated trim speed is dependent on the amount of brake the pilot is using, wing loading, altitude above sea level and the accuracy and make of speed probe. The speeds recorded in technical data were at optimum wing loading at sea level using a Flytec 6030 thus there could be a slight variation in speed range numbers that pilots records.

Speed readings in the flight reports could differ as this was measured during testing using various instruments and is an indication of the difference between trim, stall and top speed. The speed range will be the same but the actual numbers may differ.

- With 0% brake the VISTA VI will fly at 39 km/h with a sink rate of 1.3m/s.
- At 25% brake the glider will fly at 32km/h with minimum sink rate 1.1m/s.
- The best glide angle is achieved with 0% brakes and 10% speed system.
- With 80% brake the glider will fly at about 24km/h and will be close to the stall point 21km/h.

WARNING:

The use of the speed system in turbulent conditions or close to the ground is dangerous. While flying with the accelerator, the glider has a reduced angle of attack and is therefore more susceptible to turbulence and may collapse or partially deflate. Gliders react faster when accelerated and may turn more. The accelerator should immediately be released in this case.

CAUTION:

APART FROM WHEN FLARING AT LANDING THERE SHOULD BE NO REASON TO FLY WITH 70% TO 100% BRAKE. THE SINK RATE OF THE GLIDER WILL BE EXCESSIVE AND THERE WILL BE A POSSIBILITY OF ENTERING A DEEP STALL OR FULL STALL SITUATION. THERE IS ALSO THE RISK OF GOING NEGATIVE OR ENTERING A SPIN WHEN ATTEMPTING TO TURN THE GLIDER NEAR THE STALL SPEED.

THERMAL FLYING

The VISTA VI has excellent thermaling capacity and will be a pleasure even when you are in a big gaggle or just having fun on a long XC flight.

In light lift it is advised to make flat turns to keep the glider from banking too much and avoid increasing the sink rate.

In strong lift conditions it is most effective to make small turns in the core with relatively high bank.

For the best climb rate in ridge lift we recommend using about 15% to 20% brake.

ASYMMETRIC COLLAPSE

If one side of the glider partially folds or collapses it is important to keep your flying direction by applying weight shift and some brake on the opposite side.

The wing should re-inflate on its own without any input from the pilot.

To help re-inflation it is possible to pull some brake on the collapsed side and release immediately.

In the event of a big deflation, i.e. 70%, it is important to apply brake on the inflated side of the wing, but care must be taken not to pull too much as you could stall the flying side.

The glider is very solid and has a strong tendency to re-inflate after collapse.

CRAVAT

In case a cravat should occur from an asymmetric collapse or other manoeuvres, it is important to keep your flying direction by applying some brake on the opposite side and then it can usually be opened by pulling down on the stabilo line of the affected side while countering the turn with the opposite brake and weight shift.

It also helps sometimes to pull Big Ears to release the tension on the affected lines, or a combination of the above techniques, i.e., pulling on the stabilo after pulling Big Ears.

FRONT STALL OR SYMMETRIC COLLAPSE

In the event of a front stall the glider will normally re-inflate on its own immediately without any change of direction. To speed up re-inflation briefly apply 30%-40% brake (to pump open the leading edge). **Do not hold the brakes down** permanently to avoid an unwanted stall.

B-STALL

The VISTA VI has a very clean, stable B stall.

To enter the B stall the pilot has to pull the first 20-cm slowly until the glider loses forward speed and starts to descend vertically.

Then the pilot can pull more on the B until he/she attains a stable 7 to 9 m/s descent rate. The Glider has no tendency to front rosette or become pitch unstable. To exit the B stall the pilot releases the B slowly until the glider has regained its shape and then the **last 15 cm fast** to prevent the glider from entering deep stall.

The VISTA VI can be controlled directionally in the B stall by pulling more on one B riser than on the other to create a turn in any direction. The B-stall is a safe controlled way of losing altitude fast without any forward speed.

BIG EARS

Altitude can be lost in a controlled way by collapsing both tips. To do this, take the outer-most A-line (attached on its own riser) on both sides and pull them down until the tips collapse. Pulling one side at a time may be more comfortable and easier, especially for smaller pilots. This should close about 30% of the wing in total. It is possible to steer with weight shift.

To increase the sink rate the pilot can push the speed system after he/she has collapsed the tips. This can give up to about 7 m/s sink-rate with about 40-km/h forward speed. To exit, release the speed system and then release the tip A-lines.

It may sometimes be necessary to apply a little brake to open the tips. If using the brakes to open the tips, it is best to open one tip at a time, this avoids reducing your air-speed.

CAUTION:

DO NOT ATTEMPT ANY EXTREME MANEUVRES WITH THE TIPS COLLAPSED AS THIS DOUBLES THE LOAD ON THE CENTER LINES AND ATTACHMENT POINTS, WHICH COULD LEAD TO LINE FAILURE.

DEEP STALL OR PARACHUTAL STALL

Under normal flying conditions the VISTA VI will have no tendency to enter deep stall. All gliders can however under certain conditions enter and stay in deep stall configuration (as a result of ageing of materials, improper maintenance or pilot induced).

Signs of parachutal stall

- The pilot has very little or no forward speed and no wind in his face.
- The glider will be fully open but the cells will be bulging in and not out on the bottom surface.
- The glider might have a very slow turning sensation.
- You will have an increased vertical descent.

Exit from parachutal stall

It is important to recognize this situation. Most accidents involving parachutal stall happen because the pilot did not realize that he was in deep stall.

The best way to exit a parachutal stall is to pull all the A risers down to get the wing flying again. The pilot can pull the riser down until the wing starts to fly again. The moment the wing starts to fly the pilot should release the A risers, or the wing might suffer a frontal collapse.

Alternatively, the pilot can push the speed bar to lower the angle of attack and get the wing flying again.

By pulling one or both brakes while in deep stall the pilot can accidentally enter a full stall or spin. **(Not recommended)**

SPIRAL DIVES

The VISTA VI has very good behaviour in spiral and has no tendency to stick in the spiral. By progressively applying brake on one side the glider can be put into a spiral dive. Safe high sink rates can be achieved like this. The spiral has to be exited slowly by releasing the brake over one complete turn or the glider may pitch back, and then forward and possibly suffer a collapse.

CAUTION: A NOTE ABOUT SPIRALS...

SOME GLIDERS CAN BE NEUTRAL IN SPIRAL AND MAY NOT EXIT WITHOUT PILOT INPUT. TO EXIT A NEUTRAL SPIRAL THE PILOT HAS TO LEAN HIS/HER WEIGHT TO THE OUTSIDE OF THE TURN OR APPLY BRAKE ON THE OUTSIDE WING. AS SOON AS THE GLIDER STARTS TO SLOW DOWN IN THE SPIRAL THE OUTSIDE BRAKE MUST BE RELEASED.

**Care must be taken that the pilot has enough height to exit the spiral safely.
Sink rates in excess of 19m/s can be obtained.**

STRONG TURBULENCE

NEVER FLY IN STRONG TURBULENCE!

If you unexpectedly encounter strong turbulence, fly with about 20% brake applied to increase the internal pressure and the angle of attack of the canopy and land as soon as possible. If the air is turbulent on landing approach, land with Big Ears.

Learn to fly actively and to anticipate collapses and prevent them by applying brake when needed before you have unwanted collapses.

STEERING NOT FUNCTIONING

If the pilot cannot reach the brake or steering lines for any reason or if they are not functioning properly, (for example: If they break on a damaged point) the pilot can control the glider by pulling down on the rear risers.

Care must be taken when steering like this, as much less input is needed to turn the wing and the response of the wing is also much slower than when using the brakes. **If you pull too much on one or both risers the glider will spin or stall.**

On the landing flare the pilot should be especially careful not to stall the glider too high, less pull on the risers are needed than what is required when flaring with the brakes.

PARAMOTOR VERSION and Paramotoring with your VISTA VI

The Paramotor version is equipped with trims on the risers. With the Trims in the closed position the the paramotor version conforms to the certification of the PG version. The trim position should be in the closed position for take-off, landing and flight close to the ground or in turbulent conditions. The trims are useful for cruising over longer distances, and for making minor direction adjustments to compensate for torque. It is not recommended to use the trims combined with the speed bar. It is also possible and safe to use the PG version for paramotoring, however, you will not have the advantages of the trimmers. Trim risers can be ordered separately, contact your dealer for details.



18 LANDING

Before landing, the pilot should determine the wind direction, usually by checking a windsock, flags, smoke or your drift over the ground while doing one or more 360° turns.

- Always land into the wind.

- At a height of about 50 meters your landing setup should begin.
The most commonly used one is to head into the wind and depending on the wind strength the pilot should reach his/her landing point by making s-turns.
- At a height of about 15 meters the final part of your descent should be made at trim speed into the wind.
- At a height between half a meter and one meter you can gently flare the glider by pulling gradually down on the brakes to the stall point.
When top-landing it is sometimes not necessary to flare or a much smaller flare may be required, especially in strong ridge conditions.

TREE LANDING

If it is not possible to land in an open area, steer into the wind towards an unobstructed tree and do a normal landing approach as if the tree is your landing spot. Flare as for a normal landing. On impact hold your legs together and protect your face with your arms.

After any tree landing it is very important to check all the lines, line measurements, and the canopy for damage.

WATER LANDING

As you approach landing, release all the buckles (and cross-bracing if present) of the harness except for one leg. Just before landing, release the remaining buckle. It is advisable to enter the water downwind. Let the canopy rotate completely forward until it hits the water with the leading edge openings; the air inside will then be trapped, forming a big air mattress and giving the pilot more time to escape. Less water will enter the canopy this way, making the recovery much easier. **Get away from the glider and lines as soon as possible**, to avoid entanglement. Remember that a ballast bag can be emptied and then inflated with air for a flotation aid.

The canopy should be carefully inspected after a water landing, since it is very easy to cause internal damage to the ribs if the canopy is lifted while containing water. Always lift the canopy by the trailing edge, not by the lines or top or bottom surface fabric.

LANDING IN TURBULENCE

One of the safest ways to land a glider in turbulent conditions is to use Big Ears. This reduces the chances of getting a collapse while on final approach. Use weight shift to control your approach. It is possible to keep the ears in until you are ready to flare the glider. Simply

release the A-risers and flare the glider, starting a little higher than usual. Practice this in normal conditions before you need it in an emergency.

19 PACKING

Spread the canopy completely out on the ground. Separate the lines to the left and the right side of the glider. If the risers are removed from the harness, join the two risers together by passing one carabiner loop through the other. This keeps them neatly together and helps to stop line tangles.

Fold the canopy alternately from the right and left sides, working towards the centre, press out the air, working from the rear towards the front. Place the risers at the trailing edge of the folded canopy and use them to finally roll up the canopy.

20 MAINTENANCE & CLEANING

Cleaning should be carried out with water and if necessary, gentle soap. If the glider comes in contact with salt water, clean thoroughly with fresh water. **Do not use solvents of any kind**, as this may remove the protective coatings and destroy the fabric.

21 BUTT HOLE II



Your wing is equipped with Butt-hole II, which automatically clears smaller particles such as sand, grass and stones from the wing.



22 STORAGE

When the glider is not in use, the glider should be stored in a cool, dry place. A wet glider should first be dried (out of direct sunlight). Protect the glider against sunlight (UV radiation). When on the hill keep the glider covered or in the bag. Never store or transport the glider near paint, petrol or any other chemicals.

Do not leave your paraglider in the trunk of a car or exposed to the sun.

Temperatures on a hot summer's day in a closed environment: car, etc. can easily reach over 60°C

At these temperatures Nylon permanently changes its characteristics which may alter the behaviour and shape of the wing.

It will cause permanent damage to the paraglider, rendering it non-airworthy. APCO's warranty will not be applicable.

23 DAMAGE

Using spinnaker repair tape (for non-siliconized cloth) can repair tears in the sail (up to 5cm). A professional repairer should repair greater damage, or damage at structurally important points such as line attachment points, tension tapes etc.

24 GENERAL ADVICE

A qualified person or agent of the company should check the glider every year.

The glider is carefully manufactured and checked by the factory. Never make changes to the canopy or the lines. Changes can introduce dangerous flying characteristics and will not improve flying performance.

Do not put the glider in direct sunlight when not necessary. In order to protect the glider during transportation or waiting time we recommend one of our lightweight storage bags.

Paragliding and Paramotor flying should always be done in a way that has minimum impact on wildlife and the environment. Respect access regulations and the wishes and rights of landowners. Do not litter or start fires, do not smoke near your or other peoples wing and equipment. Do not launch, fly or land in a manner that harasses, disturbs or endangers people, wildlife or property. To summarise - don't be a jerk!

If you have any doubts about flying conditions - do not begin.

If you have any questions, please contact your dealer or us.

Lastly, be equipped with a certified emergency parachute and helmet on every flight.

25 RECYCLING

If you need to dispose the wing, do so in an environmentally responsible manner. Recycling of many parts of the wing is possible, and there are some organizations that manufacture reusable shopping bags, windsocks, backpacks and more using old donated wings. Funds raised are often used for charitable donations. Search the web, or contact *The Cloudbase Foundation* for more information or advice. Do not dispose of a retired wing with normal household waste.


26LINE TABLES & DIAGRAMS

| | 00 | 04 | 06 | 08 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | St |
|----|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A | 2230 | 2180 | 2075 | 2040 | 1515 | 1390 | 1260 | 1175 | 1020 | 975 | | | | | | | | | | | | | | | | |
| B | 2230 | 2180 | 2075 | 2040 | 1515 | 1390 | 1260 | 1175 | 1025 | 970 | | | | | | | | | | | | | | | | |
| C | 2230 | 2180 | 2075 | 2040 | 1515 | 1390 | 1260 | 1165 | 1010 | 975 | | | | | | | | | | | | | | | | |
| Br | 3215 | 1090 | 930 | 870 | 870 | 770 | 730 | 765 | 725 | 800 | 725 | 730 | 770 | | | | | | | | | | | | | |
| | 2200 | | 1715 | | | | 2200 | | | | | | | | | | | | | | | | | | | |

| | | |
|------------------|-----------|---------------|
| Top, Mid | Superaram | 1.2 - 120 kg. |
| Bottom A,B,C | Superaram | 1.9 - 320 kg. |
| Bottom St | Superaram | 1.5 - 150 kg. |
| Brake top,St top | Dyneema | 1.1 - 95 kg. |
| Brake bottom | Dyneema | 2.0 - 230 kg. |

* Marking point for knot on Br 150 mm shorter than total length.

| | | | |
|------------------------|------------------------|---------------|----------------|
| Drawn by Adam Wechsler | Part N | Toll±5 | Qty per glider |
| Date 2023 05 07 | Name | Rev | |
| Scale - | Table of length lines. | | 0 |
| Approved Anatoly Cohn | Product | Vista VI "XS" | |
| APCO Aviation LTD. | | | |

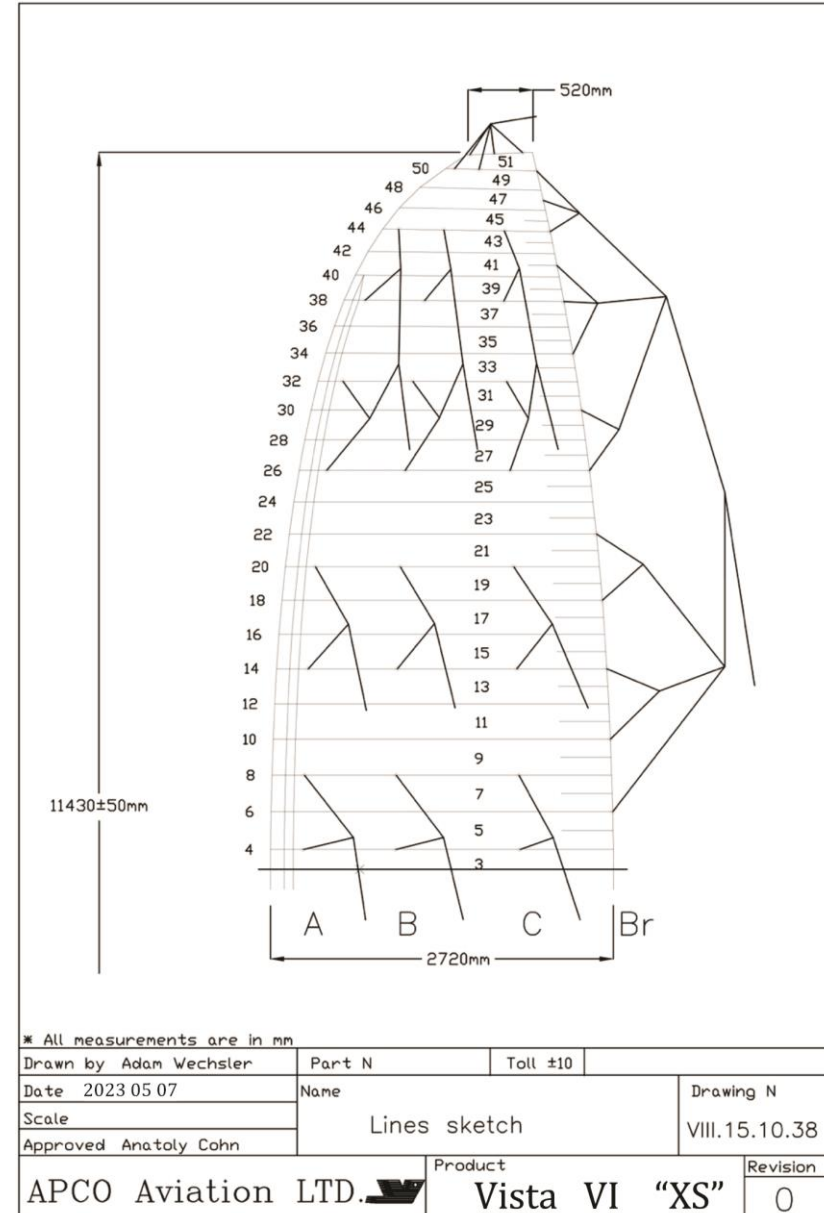


| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | 00 | 04 | 06 | 08 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | St |
| A | 2230 | 2195 | 2075 | 2060 | 1505 | 1700 | 1400 | 1245 | 1190 | 1020 | 975 | | | | | | | | | | | | | | | |
| B | 2230 | 2195 | 2075 | 2060 | 1505 | 1700 | 1400 | 1245 | 1190 | 1025 | 970 | | | | | | | | | | | | | | | |
| C | 2230 | 2195 | 2075 | 2060 | 1505 | 1700 | 1400 | 1245 | 1175 | 1010 | | | | | | | | | | | | | | | | |
| Br | 3215 | 1090 | 930 | 870 | 870 | 770 | 730 | 765 | 725 | 800 | 725 | 730 | 770 | | | | | | | | | | | | | |
| | 4290 | | 4365 | | 3230 | | 1760 | | | | | | | | | | | | | | | | | | | |
| | 4230 | | 4310 | | 3155 | | 1775 | | | | | | | | | | | | | | | | | | | |
| | 4320 | | 4400 | | 3240 | | 1745 | | | | | | | | | | | | | | | | | | | |
| | 2200 | | 1890 | | 2200 | | | | | | | | | | | | | | | | | | | | | |

| | | |
|-------------------|-----------|---------------|
| Top, Mid | Superaram | 1.2 - 120 kg. |
| Bottom A,B,C | Superaram | 1.9 - 320 kg. |
| Bottom St | Superaram | 1.5 - 150 kg. |
| Brake top, St top | Dyneema | 1.1 - 95 kg. |
| Brake bottom | Dyneema | 2.0 - 230 kg. |

* Marking point for knot on Br 150 mm shorter than total length.

| | | | | |
|----------|---------------|---------|------------------------|----------------|
| Drawn by | Adam Wechsler | Part N | Toll ±5 | Qty per glider |
| Date | 2023 05 07 | Name | Table of length lines. | Rev |
| Scale | - | | | 0 |
| Approved | Anatoly Cohn | Product | Vista VI "S" | |

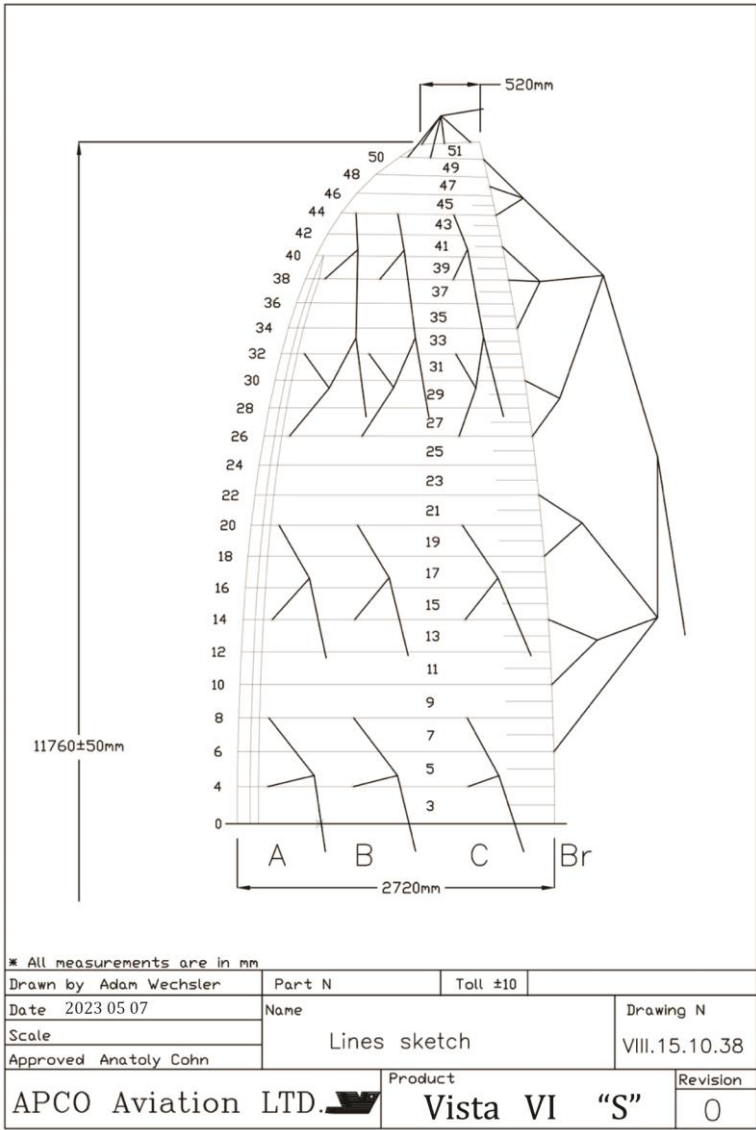


| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|----|----|----|----|------|----|----|------|------|
| | 00 | 02 | 04 | 06 | 08 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | St |
| A | 575 | 540 | 2175 | 2075 | 2045 | 1480 | 1400 | 1245 | 1190 | 1055 | 975 | | | | | | | | | | | | | | | | 5165 |
| B | 575 | 540 | 2175 | 2075 | 2045 | 1480 | 1400 | 1245 | 1175 | 1010 | 960 | | | | | | | | | | | | | | | | 5165 |
| C | 575 | 540 | 2175 | 2075 | 2045 | 1480 | 1400 | 1245 | 1150 | 985 | | | | | | | | | | | | | | | | 5165 | |
| Br | 1575 | 1265 | 1090 | 930 | 870 | 870 | 780 | 740 | 765 | 725 | 800 | 725 | 730 | 770 | | | | | | | | | | | | 5165 | |
| | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | | | | | | | | | | | | 5165 | |
| | 2200 | | | 2280 | | | | 2200 | | | | | | | | | | | | | | | 5165 | | | | |

| | | |
|------------------|-----------|---------------|
| Top, Mid | Superaram | 1.2 - 120 kg. |
| Bottom A,B,C | Superaram | 1.9 - 320 kg. |
| Bottom St | Superaram | 1.5 - 150 kg. |
| Brake top,St top | Dyneema | 1.1 - 95 kg. |
| Brake bottom | Dyneema | 2.0 - 230 kg. |

* Marking point for knot on Br 150 mm shorter than total length.

| | | | | |
|----------|---------------|---------|------------------------|----------------|
| Drawn by | Adam Wechsler | Part N | Toll±5 | Qty per glider |
| Date | 2023 05 07 | Name | Table of length lines. | Rev |
| Scale | - | | | 0 |
| Approved | Anatoly Cohn | Product | Vista VI "M" | |

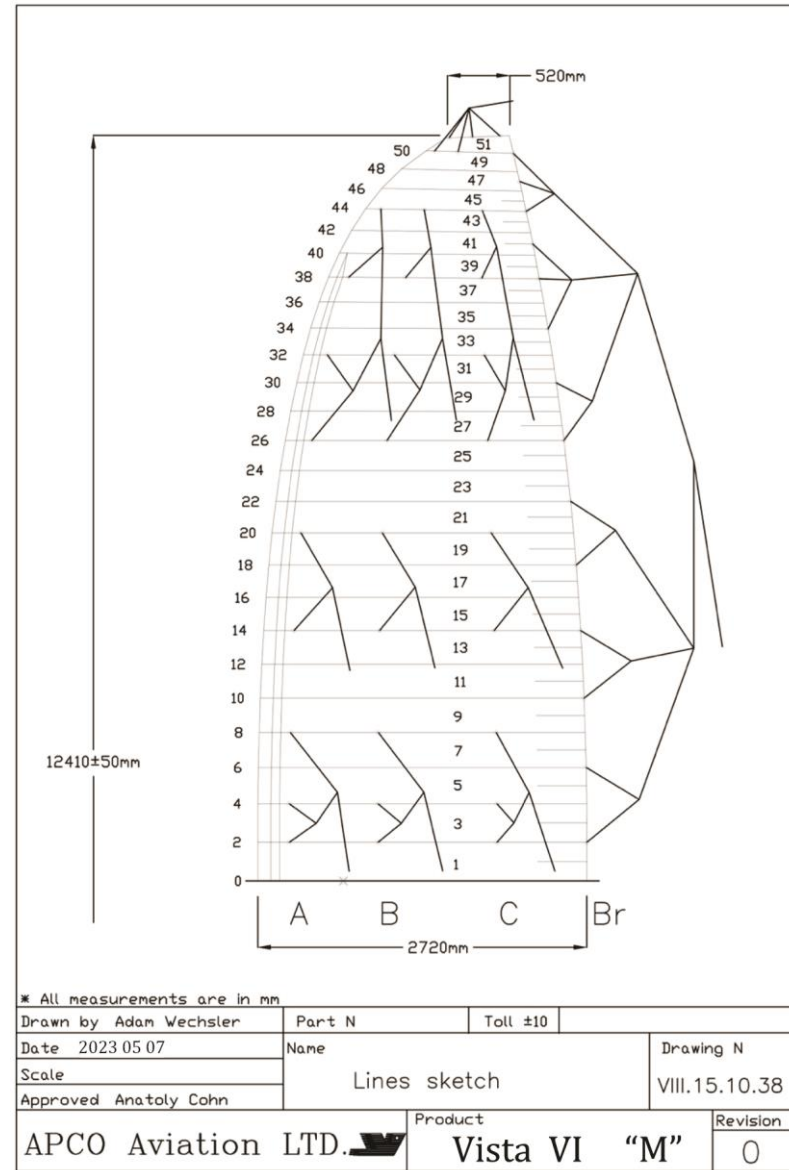


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | 00 | 02 | 02 | 04 | 06 | 08 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | St |
| A | 1150 | 1085 | 1075 | 2670 | 2075 | 2065 | 1495 | 1360 | 1245 | 1145 | 1065 | 975 | | | | | | | | | | | | | | | | |
| | 1620 | 1075 | 2670 | 2075 | 2065 | 1495 | 1710 | 1360 | 1245 | 1700 | | | | | | | | | | | | | | | | | | |
| | 4660 | | | 5195 | | | 4080 | | | | | | | | | | | | | | | | | | | | | |
| B | 1150 | 1085 | 1075 | 2670 | 2075 | 2065 | 1495 | 1360 | 1245 | 1130 | 1010 | 960 | | | | | | | | | | | | | | | | |
| | 1620 | 1075 | 2670 | 2075 | 2065 | 1495 | 1710 | 1360 | 1245 | 1720 | | | | | | | | | | | | | | | | | | |
| | 4585 | | | 5115 | | | 3990 | | | | | | | | | | | | | | | | | | | | | |
| C | 1150 | 1085 | 1075 | 2670 | 2075 | 2065 | 1495 | 1360 | 1245 | 1115 | 975 | | | | | | | | | | | | | | | | | |
| | 1620 | 1075 | 2670 | 2075 | 2065 | 1495 | 1710 | 1360 | 1245 | 1685 | | | | | | | | | | | | | | | | | | |
| | 4715 | | | 5230 | | | 4055 | | | | | | | | | | | | | | | | | | | | | |
| Br | 1650 | 1370 | 1115 | 930 | 870 | 870 | 810 | 790 | 745 | 705 | 780 | 690 | 685 | 715 | | | | | | | | | | | | | | |
| | 2000 | 1370 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | | | | | | | | | | | | | | |
| | 2200 | | | 2760 | | | 2200 | | | | | | | | | | | | | | | | | | | | | |

| | | |
|------------------|-----------|---------------|
| Top, Mid | Superaram | 1.2 - 120 kg. |
| Bottom A,B,C | Superaram | 1.9 - 320 kg. |
| Bottom St | Superaram | 1.5 - 150 kg. |
| Brake top,St top | Dyneema | 1.1 - 95 kg. |
| Brake bottom | Dyneema | 2.0 - 230 kg. |

* Marking point for knot on Br 150 mm shorter than total length.

| | | | |
|------------------------|------------------------|---------|----------------|
| Drawn by Adam Wechsler | Part N | Toll ±5 | Qty per glider |
| Date 2023 05 07 | Name | Rev | |
| Scale - | Table of length lines. | | 0 |
| Approved Anatoly Cohn | Product Vista VI "L" | | |

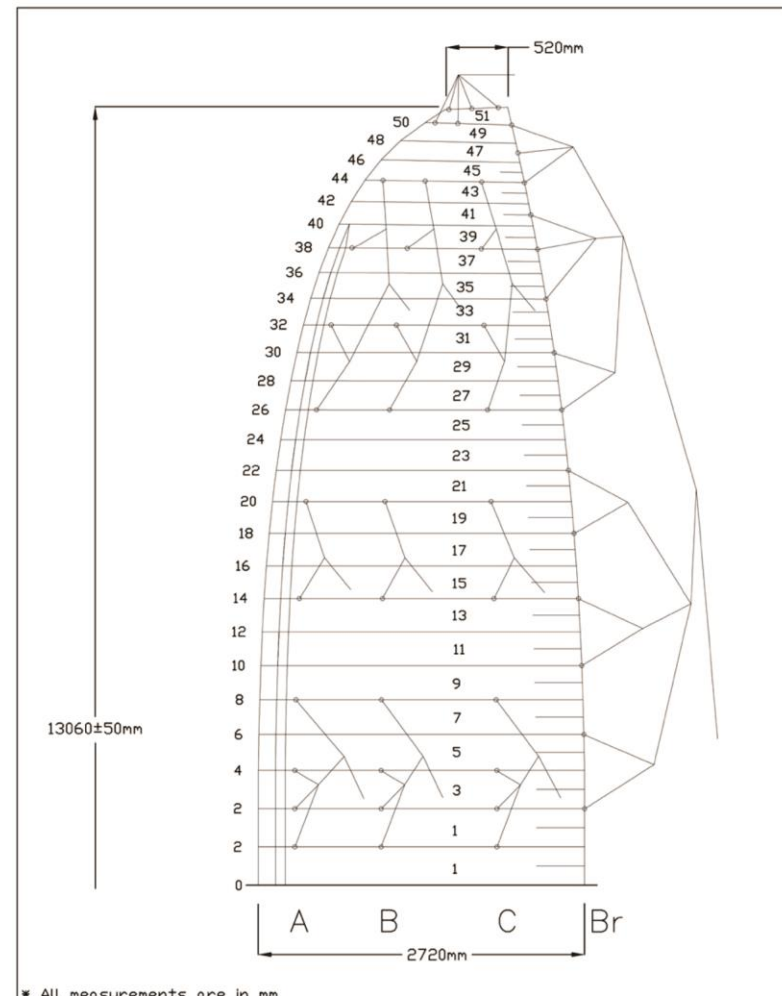

* All measurements are in mm

| | | | |
|------------------------|----------------------|---------------|-----------|
| Drawn by Adam Wechsler | Part N | Toll ±10 | Drawing N |
| Date 2023 05 07 | Name | VIII.15.10.38 | |
| Scale | Lines sketch | | Revision |
| Approved Anatoly Cohn | Product Vista VI "L" | | 0 |



